

VANDAL/CANOPY INDUCTION LUMINAIRE

The Vandal/Canopy Induction Luminaire utilizes a soft-cornered design to provide excellent light distribution and an aesthetically appealing appearance. Ideal for storage areas, parking areas, manufacturing facilities, warehouses and canopy lighting.

Product Specifics

Light Source	One 40 Watt Induction Lamp
Lumens	2800 Lumens
Color Temperature	5000K
CRI	>80 (Ra)
Input Voltage	120 or 277 VAC, 50/60Hz
Fixture Weight	19 Lbs.
Rated Life	100,000 Hours
Warranty – Housing Components	2 Year Limited
Warranty – Lamp and Ballast	10 Year Limited
Ratings	UL, CSA, CE, FCC, ISO, IP65

Detailed Specifications

CONSTRUCTION

Features a durable, corrosion-resistant, die-cast aluminum enclosure with an architectural bronze or white powder coated finish. Enclosure is fully sealed and gasketed, and is Wet Location Listed for outdoor use and includes corrosion-resistant hardware. Features an internal, white steel reflector which provides ideal light distribution, and the lamp is protected by a vandal-resistant, UV stabilized polycarbonate prismatic refractor.

ELECTRONICS

Utilizes an electronic ballast, producing a high-frequency current, controlled by an integrated circuit (IC) chip allowing a power factor of up to 99%. Minimum operating temp of -25°C (-13°F), maximum operating temp of 50°C (122°F).


LAMPS (Included)

Available with (1) 40W rectangular induction lamp that provides 2800 initial lumens per lamp. The induction lamps have a 5000K color temperature, provide a CRI of >80 (Ra) and have a 100,000 hour rated life. Lamps and Ballasts are listed and certified by CE, FCC, UL, ISO and also meet the Electromagnetic Compatibility (EMC) standard.


INSTALLATION

Ideal for mounting to any horizontal surface and features 1/2" NPT entry points for conduit access.

Specifications are subject to change without notice.



Photometrics

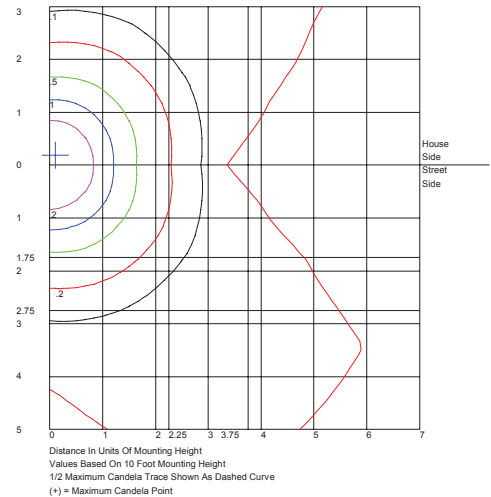

Ordering Information

Model	Lamp	Volts	OPTIONS Factory Installed
DXVN40	IND40	120 = 120V	PC1 = 120V Photocell
		277 = 277V	PC2 = 277V Photocell
Ordering Example:	DXVN40-IND40-120-PC1		