



REL Series

INDOOR ARCHITECTURAL EMERGENCY



PROJECT: _____
 FIXTURE TYPE: _____
 LOCATION: _____
 CONTACT/PHONE: _____




SPECIFICATIONS: INTERNAL

The REL is configured with 120/277VAC input with solid state charging circuitry. Standard features include low voltage disconnect, AC lockout and brownout protection.

SPECIFICATIONS: EXTERNAL

The REL cabinet is constructed from durable 20 gauge steel. White powder coat finish is standard, (other colors optional). Emergency lighting heads are molded from high impact thermoplastic in a matching color; PAR36 (LR) style heads are standard. PAR18 (SR) style heads are optional. MR16 (MRB) are also offered. External test switch and monitor LED are standard.

DIMENSIONS

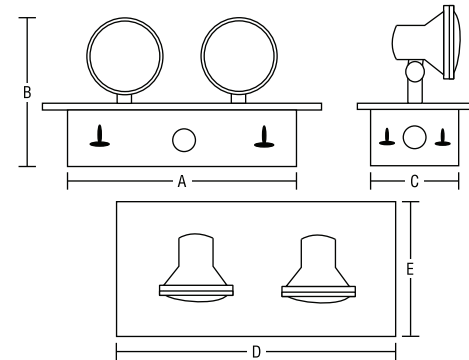

Series	A	B	C	D	E
REL	10.2"	9.5"	8.1"	13"	9.2"
	259mm	241mm	206mm	330mm	234mm

NOTE: Dimension B (see drawing) will vary bases on heads supplied.



ORDERING INFORMATION

Series	Operation	Pb-A ¹ (Capacity)	Ni-Cd ² (Capacity)	Emergency Heads	Lamps	Voltage	Options
REL	6V	18 (6V)	22 (6V)	2LR (double PAR36)	See lamp selection	120/277VAC	SD (self-diagnostic)
		27 (6V, 12V)	42 (6V, 12V)	0 (no heads)	on next page		B (black finish)
	12V	36 (6V, 12V)		2SR (double PAR18)			BZ (buzzer)
				2MRB (double, MR16)			NC ³ (nickel cadmium battery)
				1MRB (single, MR16)		TD ⁴ (time delay - specify 5, 10, 15 min)	
						TC (teflon coated)	

[1]NOTE: Sealed lead calcium.
 [2]NOTE: Nickel-cadmium. Must select NC from options when selecting Ni-Cd.
 [3]NOTE: NC (select wattage/voltage from Ni-Cd column).
 [4]NOTE: Specify AC input voltage. Must specify at time of order, 10 min standard.

EXAMPLE: REL-12-27-2MRB-20W



REL Series

INDOOR ARCHITECTURAL EMERGENCY



PROJECT: _____
 FIXTURE TYPE: _____
 LOCATION: _____
 CONTACT/PHONE: _____

EMERGENCY HEADS

The REL is normally supplied with two [2] PAR36 (LR) style heads. PAR18 (SR) style heads are optional, or MRB white steel heads utilizing MR16 lamps are also available option. The LR and SR head types feature a unique twist locking collar that securely holds the lens and facilitates quick and easy re-lamp-ing.

SPECIFICATIONS: ELECTRICAL

BATTERY: The REL is designed with a maintenance free, sealed valve regulated lead acid battery that provides a minimum emergency duration of 90 minutes. Optional nickel cadmium batteries are available. Recharge time of the battery is twenty-four [24] hours. The operating temperature is from 50°F up to 104°F (10°C up to 45° C).

CIRCUIT: The REL utilizes a high-efficiency two stage charger providing precise float voltage control with low voltage disconnect protection. The charger also has brownout and short circuit protection. Charger status is easily determined via a dual diagnostic LED display which indicates AC/ON and High Charge. All components used in the circuitry are temperature compensated. An external push button test switch allows maintenance personnel to quickly determine the operational status of the unit and lamp load.

SPECIFICATIONS: MECHANICAL

Torsion springs firmly hold the REL cover in place allowing for easy installation and maintenance. Remote lamp loads are connected to the emergency power supply with sturdy terminal connectors. These connectors allow for a large gauge of wire to be used, increasing the flexibility of installation.

SELF-DIAGNOSTIC

The Mule self-diagnostic system performs one 5 minute discharge test monthly. Every 6 months two 90 minute discharge tests are performed. This tests both full battery capacity and recharge capability, as required by the fire code. The information is communicated simply and intuitively to maintenance personnel via a single multi-color LED. When the LED is green the unit is functioning normally. If the LED is yellow there is a malfunction in the lamp circuit. A red LED indicates a battery or charger problem, including low battery capacity. The Mule self-diagnostic system also includes 0, 5, 10 or 20 minute time self-diagnostic delay function to allow HID lighting restrike.

- Red: Battery or Circuit Malfunction
- Yellow: Lamp Malfunctioning
- Green: Normal Operation

LAMP SELECTION

	6V	12V
Incandescent	7.2, 9W	9, 12, 18W
Halogen (H)	12W	12, 20W (55W PAR36 only)
MR16 (MRB)	-	20, 35, 50W
MR16 LED ^[1]	5, 7W	2, 5, 7W

[1]NOTE: LED lamps can be installed in SRP & MRB heads only.

MODEL RATING GUIDE

Model	Voltage	Wattage			
		90min	120min	180min	240min
REL-6-18	6	18	12	N/A	N/A
REL-6-22	6	22	17	11	9
REL-6-27	6	27	20	N/A	N/A
REL-6-36	6	36	27	18	14
REL-6-42	6	42	32	21	16
REL-12-27	12	27	20	14	10
REL-12-36	12	36	24	18	12
REL-12-42	12	42	32	21	16

WARRANTY

The REL comes with a 3-year factory warranty. Lamps are not covered under the warranty. Deliberate damage, misuse, improper installation effectively cancel the warranty.