

WALL PACK

The DXWPS30 Series are ideal for parking areas, entrances, walkways, underpasses, loading docks, and recreation areas. Available with Metal Halide, Pulse Start Metal Halide or High Pressure Sodium lamps for any application.

Detailed Specifications

CONSTRUCTION

The DXWPS30 Series features a durable, die-cast aluminum housing with an architectural bronze powder coated finish. Enclosure is fully sealed and gasketed, and is Wet Location Listed for outdoor use. Enclosure and hardware are corrosion resistant. The DXWPS30 features an internal, anodized aluminum reflector which provides ideal light distribution, and the lamp(s) are protected by a vandalresistant, polycarbonate prismatic refractor.

LAMPS & BALLASTS

High Pressure Sodium: Lamps from 35 to 150 watts, utilizing a medium base, glazed porcelain socket pulse rated for 4KV with either a R-NPF or HX-HPF type ballast rated for a minimum operating temperature of -30OC (-22OF) and 120VAC, Multi-tap (120/208/240/277VAC) or 480VAC input.

Metal Halide: Lamps from 50 to 100 watts, utilizing a medium base, glazed porcelain socket pulse rated for 4KV with an HX-HPF ballast rated for a minimum operating temperature of -30OC (-22OF) and Multi-tap (120/208/240/277VAC) or 480VAC input.

Pulse Start Metal Halide: Lamps from 150 watts, utilizing a medium base, glazed porcelain socket pulse rated for 4KV with a CWA ballast rated for a minimum operating temperature of -30OC (-22OF) and Multi-tap (120/208/240/277VAC) or 480VAC input.


Compact Fluorescent: 4-pin Triple Tube lamps from 26 to 84 watts, utilizing a GX24-q3 base with an electronic programmed start ballast rated for a minimum operating temperature of -20oc (-4of) and 120/277Vac input

INSTALLATION

The DXWPS30 Series is ideal for mounting to any vertical surface and features a hinged design for easy access to internal components. Unit can be wired to a 4" junction box or surface mounted using 1/2" NPS conduit entry points.

WARRANTY

Any housing component that fails due to manufacturer's defect is guaranteed for two years from time of shipment. Ballasts, Capacitors, and Ignitors are warrantied for one year from time of shipment. Warranty does not apply to damages caused by improper installation, abuse, fire or acts of God. Lamp is not covered by manufacturer's warranty

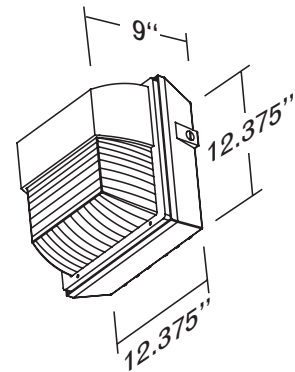

Approximate Weight: 15 lbs.



Ordering Information

Accessories (order seperately)

Model	Lamp (Type-Watts)	Volts	Options
DXWPS30	Metal Halide	120 = 120V	QR150 = 150W Quartz Restrike SZXXX = Single Line Side Fuse (Specify 120 or 277V) DZXXX = Double Line Side Fuse (Specify 208, 240, or 480V) USA = Meets Buy America Requirements
	MH-50	DT = 120/277V	
	MH-70	MT = 120/208/240/277V	
	Pulse Start Metal Halide	480 = 480V	
	PSMH-150		
	Compact Fluorescent		
	CF-26		
	CF-32		
	CF-42		
	CF-26x2		
	CF-32x2		
	CF-42x2		
	High Pressure Sodium		
	HPS-35		
	HPS-50		
	HPS-70		
	HPS-100		
	HPS-150		

Model
PC1 = 120V Photocontrol
PC2 = 208-277V Photocontrol

Ordering Example: DXWPS30-MH-100-MT