




CRR Exit Sign

Crystal Recessed Edge-Lit Exit



PROJECT: _____
 FIXTURE TYPE: _____
 LOCATION: _____
 CONTACT/PHONE: _____

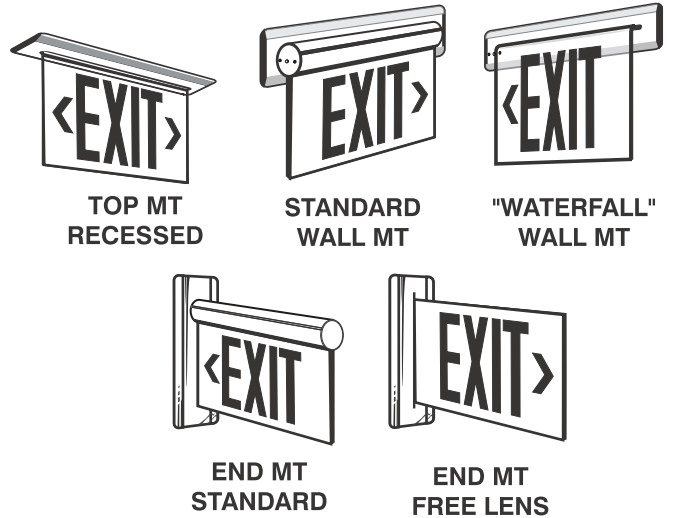

PRODUCT DESCRIPTION

The CRR Recessed LED Edge Lit Exit Sign is suitable for almost any mounting configuration. The edge-lit panel is constructed of high-grade acrylic with custom graphics and directional arrows to point towards the exit direction. The removable front cover makes installation and maintenance headache-free!

FEATURES

- An extruded aluminum LED lamp housing is fitted within a recessed back box fabricated from 18 SWG galvanized steel.
- Standard finishes: satin white enamel and brushed aluminum.
- Diamond polished acrylic lenses for optimum light transmission, exterior quality and high brightness.
- Ultra high output LEDs with up to 5 candela output in green or red produce brilliant graphic illumination well above code minimums.
- An advanced microprocessor monitors all charger functions and battery condition continuously, with software to automatically perform all tests and visual indications required by UL Standard 924 and NFPA 101.

ORDERING INFORMATION

Series	Operation	No. of Faces	Letter Color	Background Color	Trim Finish	Arrow Direction	Mount	Options
CRR	BB = Battery Backup	1 = Single Face	R = Red	C = Clear	W = White	NA = No Arrow	T = Top	See Page 2
	NB = No Battery (AC Only)	2 = Double Face	G = Green	M = Mirror	K = Black	AB= Arrow Both <>	W = Wall	
				W = White	A = Alum	AR= Arrow Right >		
				K = Black	B = Satin Bronze	AL= Arrow Left <		
				X = Custom	X = Custom			
						<u>Double Face Signs</u>		
						NA= No Arrow		
						LR= Single Arrow >		
						AB= Arrow Both <>		
						CX = Custom Graphics		

EXAMPLE: CRR-BB-1-R-C-B-NA-T-DG

ELECTRONICS

- Self-Test/Self-Diagnostic operation in battery backup versions.
- Low Voltage Disconnect prevents deep battery discharge
- Universal 120/ 277 VAC input for standard battery or AC unit, or 24 VDC input for remote configuration.
- Power supply is surge and spike protected.
- The complete power supply module with optional NICAD battery pack is sealed within a plastic enclosure. AC and DC wiring is quickly attached with plug connectors.
- Standard Operating Temperature: 0°C to 50°C

CODES

- Manufactured and tested to UL Standard 924, NFPA Life Safety Code101, and certified to Ip66.

WARRANTY

- 5 year total customer satisfaction warranty.





CRR Exit Sign

Crystal Recessed Edge-Lit Exit



PROJECT: _____
 FIXTURE TYPE: _____
 LOCATION: _____
 CONTACT/PHONE: _____

SUGGESTED SPECIFICATIONS

Install CRR recessed LED exit signs, available as unit equipment or as a remote device connected to a central battery power source. The lamp housing and canopy shall be of extruded aluminum, graphic lenses shall be optical grade acrylic with diamond polished edges. Lighting uniformity shall be better than 4:1 when measured over any illuminated area and average brightness will exceed 6 ft Lambert (21 Cd/m²).

Life expectancy of the LEDs shall be in excess of 20 years. The power supply and charger shall be an isolated digital type with regulated current and voltage output to the lamp load and batteries (emergency models). AC supply shall be universal 120/277 VAC input via two-wire feed. One standard power supply shall be capable of driving up to 5 single face remote signs in addition to the master, with emergency operation at least 90 minutes for each sign. Battery charge time to restore full capacity after discharge shall be less than 24 hours.

SELF-TEST DIAGNOSTIC FUNCTIONS

STATUS	LED DISPLAY
NORMAL MODE	OFF
FAILED LAMP	● GREEN
FAILED CHARGER	● RED
FAILED TRANSFER	● ORANGE
FAILED BATTERY	● RED FLASH
FAILED ANNUAL TEST	● ORANGE FLASH

OPTIONS

CODE

Auto Battery Diagnostics -----	DG
Damp Location -----	DP
Dual AC Input (120 VAC) -----	DAC120
Dual AC Input (277 VAC) -----	DAC277
2 Hour Emergency Operation -----	2EM
End Mount (Left/ Right) -----	LE/RE
End Mount- Free Lens(Left/Right)---	LEF/REF
Waterfall Wall Mount-Clear -----	WFC
Waterfall Wall Mount-Backplate ----	WFB
Stainless Steel Trim -----	SS

BATTERY DIAGNOSTIC FUNCTIONS

Microprocessor programmed to perform tests as follows:

Continuous Monitoring w/ 1 Second Sampling	Every 28 Days	Every 12 Months
Lamp Connections	Transfer switch function	Full 90 minute emergency operation test with test/ fail and manual report signal
Battery Connections	Battery discharge rate under full load	
	Test switch indicator function	


LOAD SPECIFICATIONS FOR CENTRAL BATTERY SYSTEM

FIXTURE	EPR (Watts)
CRR1RE	2
CRR2RE	4


EPR= Emergency Power Rating for Battery Load

MOUNTING DATA & DIMENSIONS


WALL MOUNT-WATERFALL LENS

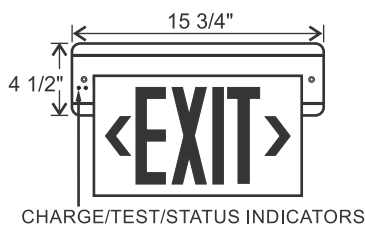


WALL MOUNT-STANDARD



TOP MOUNT

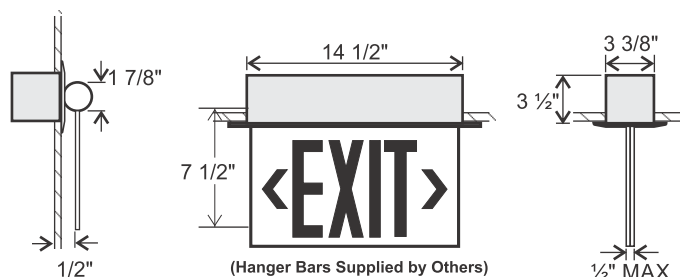

END MOUNT-STANDARD

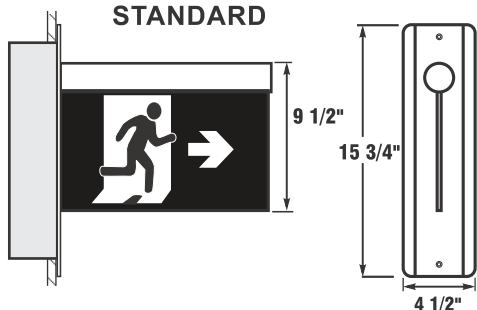

END MOUNT-FREE LENS

