

HYDROLUME™ 24V LED STRIP LIGHT

AVAILABLE CCTs 3500K
6500K

QTY	STRIP LIGHT OPTION Cuttable every 7.08 in.	CCT Choose from the "Available CCTs" list above	CUT LENGTH* 7.08 in. increments 82 ft. max.		TOTAL POWER FEED LENGTH** 1 inch increments (max. length is based on tape length and voltage drop)**
			FEET	INCHES	
2	SAMPLE HYDROLUME	SAMPLE 3500K	SAMPLE 0	SAMPLE 28.32	SAMPLE 60

← Sample entry for two sections of HYDROLUME 3500K Tape Light, 28.32 in. lengths, each with a 60 in. wire lead.

CUSTOM JUMPERS, CCT, OR CRI:
For a quote for series configurations of multiple tape strip sections connected with jumpers, or for custom CCT or CRI, please call the Specifications and Quotes department at 401.941.4446


* Due to variations in the tape light manufacturing process, Custom Finished Tape Light can vary up to +/- one cut point section.
** Please refer to the voltage drop chart on the other side of this sheet.

ACCESSORIES (sold separately)

**HYDROLUME Mounting Bracket
DI-HL-MTBR**
This bracket mounts to surfaces with a single screw. HYDROLUME is then snapped into place.

**HYDROLUME Mounting Channel
DI-HL-MTCH**
These 39.4 in. (1 meter) mounting channels are easily trimmed to custom lengths.

**HYDROLUME Stake Bracket
DI-HL-STBR**
This raises the strip light so that it's clear of low foliage, dirt, and surface obstructions.

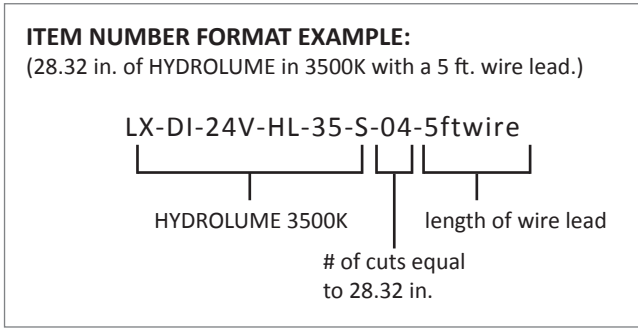

Rep/Dealer Name	
Rep/Dealer Address	
Contact Name	
Job Name	
Phone	
Email	
Submit this form by email to INFO@LEDALUX.com or by fax to 401.941.2929	

HYDROLUME™ 24V LED STRIP LIGHT



WIRE LEAD LENGTH

(Available Factory Finished Lead Lengths)

Inches	Feet	6'-9"	10'	11'	12'	13'	14'	15'	16'	17'	18'	19'	20'	21'	22'	23'	24'	25'	26'	27'	28'	29'	30'	31'	32'	33'	34'	35'	36'	37'	38'	39'	40'	41'	42'	43'	44'	45'				
		7.08"-226.56"	.59'-18.88'																																							
233.64"	19.47'																																									
240.72"	20.06'																																									
247.80"	20.65'																																									
254.88"	21.24'																																									
261.96"	21.83'																																									
269.04"	22.42'																																									
276.12"	23.01'																																									
283.20"	23.60'																																									
290.28"	24.19'																																									
297.36"	24.78'																																									
304.44"	25.37'																																									
311.52"	25.96'																																									
318.6 - 325.68"	26.55 - 27.14'																																									
332.76"	27.73'																																									
339.84 - 346.92"	28.32 - 28.91'																																									
354 - 361.08"	29.5 - 30.09'																																									
368.16"	30.68'																																									
375.24 - 382.32"	31.27 - 31.86'																																									
389.4 - 396.48"	32.45 - 33.04'																																									
403.56 - 417.72"	33.63 - 34.81'																																									
424.8 - 431.88"	35.4 - 35.99'																																									
438.96 - 453.12"	36.58 - 37.76'																																									
460.2 - 474.36"	38.35 - 39.53'																																									
481.44 - 495.6"	40.12 - 41.3'																																									
502.68 - 523.92"	41.89 - 43.66'																																									
531 - 545.16"	44.25 - 45.43'																																									
552.24 - 580.56"	46.02 - 48.38'																																									
587.64 - 615.96"	48.97 - 51.33'																																									
623.04 - 651.36"	51.92 - 54.28'																																									
658.44 - 693.84"	54.87 - 57.82'																																									
700.92 - 743.4"	58.41 - 61.95'																																									
750.48 - 800.04"	62.54 - 66.67'																																									
807.12 - 870.84"	67.26 - 72.57'																																									
877.92 - 948.72"	73.16 - 79.06'																																									
955.8 - 977.04"	79.65 - 81.42'																																									

18/2 AWG

LENGTH OF TAPE LIGHT

 18/2 AWG
 N/A

These recommended wire gauges are based on the National Electrical Code (NEC).
Please consult with a licensed electrician or recognized authority to verify local code requirements.
Select wire gauges are available for purchase.

Voltage drop is the amount of voltage loss that occurs through a tape light due to impedance. LED lights requires a minimum amount of current to properly light; less than the minimum current can cause an LED to flicker, operate less brightly, or shift in color.

Use the wire gauge chart to the left to determine the maximum wire lead length for your custom tape light length.