



ARRIS Series

ULTRA-THIN DIECAST ALUMINUM LED EXIT



PROJECT: _____
FIXTURE TYPE: _____
LOCATION: _____
CONTACT/PHONE: _____

PRODUCT DESCRIPTION

The ARRIS Series Thin Die Cast Aluminum LED Exit Signs offer long lamp life, energy efficiency and uniform illumination. Its architecturally pleasing design, along with a variety of durable finishes, have made this the exit of choice for architectural and commercial environments. Possessing premium installation features such as a snap-fit faceplate, pre-drilled canopy attachment locations and easily removable chevron directional indicators, the ARRIS Series offers the strength of diecast aluminum construction in a simple-to-install design.

PRODUCT SPECIFICATIONS

CONSTRUCTION

Die cast aluminum housing and faceplate • Includes die cast aluminum canopy for top or end mounting • Universal mounting pattern knockouts for J-box mounting • Pre-drilled canopy attachment locations with easily removed hole covers • Integral wiring channels • Snap-fit faceplate • 6" letters with 3/4" stroke width • Easily removable chevron directional indicators • Red or green letters • Available in white, black or brushed aluminum finish.

ELECTRICAL

Dual voltage 120/277VAC • Rated for use in damp locations • Solid state charging and switching • Brownout protection • Battery low voltage disconnect • Overload and short circuit protection • AC power indicator and test switch.

LAMPS

Long life, energy saving LED lamps • Red or green LED/letters • Signs consume less than 3 watts.

BATTERY

Long-life, maintenance-free, high performance nickel cadmium • Designed to operate over a wider range of temperature conditions (32°F-100°F recommended operating range) • Battery will operate sign for a minimum of 90 minutes in the event of a power outage.

CODE COMPLIANCE UL924 • Damp location rated • NFPA 101 Life Safety Code compliant • NEC and OSHA compliant •

WARRANTY

5-year warranty. Product specifications subject to change without notice.

INSTALLATION

MOUNTING

May be top, end or back mounted • All signs include diecast aluminum canopy and mounting hardware for easy top or end mount installation • Backplate includes universal mounting pattern knockouts for simple J-box mounting




ORDERING INFORMATION

model	operation	# faces	color (Letters)	color (Housing)
ARS	A = AC Only	1 = Single	R = Red	BB = All Black
	B = Battery Backup	2 = Double	G = Green	WW = All White
				AA = All Brushed Aluminum

Notes

¹ Order as separate line item. Field installation

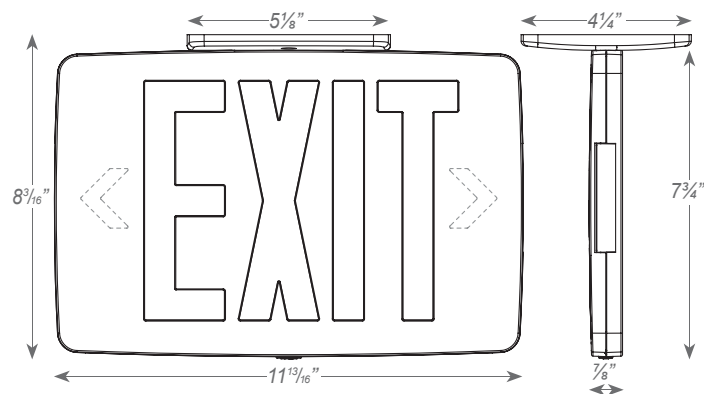

ACCESSORIES¹

ACCESSORY	DESCRIPTION
WG2	Wire Guard (wall mount)
WG3	Wire Guard (ceiling mount)
VRS1	Polycarbonate Vandal Shield

Ordering Example: ARS-B-1-R-AA