



# ARRIS Series

ULTRA-THIN DIECAST ALUMINUM LED EXIT



PROJECT: \_\_\_\_\_  
 FIXTURE TYPE: \_\_\_\_\_  
 LOCATION: \_\_\_\_\_  
 CONTACT/PHONE: \_\_\_\_\_

## PRODUCT DESCRIPTION

The ARRIS Series Thin Die Cast Aluminum LED Exit Signs offer long lamp life, energy efficiency and uniform illumination. Its architecturally pleasing design, along with a variety of durable finishes, have made this the exit of choice for architectural and commercial environments. Possessing premium installation features such as a snap-fit faceplate, pre-drilled canopy attachment locations and easily removable chevron directional indicators, the ARRIS Series offers the strength of diecast aluminum construction in a simple-to-install design.

## PRODUCT SPECIFICATIONS

### CONSTRUCTION

Die cast aluminum housing and faceplate • Includes die cast aluminum canopy for top or end mounting • Universal mounting pattern knockouts for J-box mounting • Pre-drilled canopy attachment locations with easily removed hole covers • Integral wiring channels • Snap-fit faceplate • 6" letters with 3/4" stroke width • Easily removable chevron directional indicators • Red or green letters • Available in white, black or brushed aluminum finish.

### ELECTRICAL

F wri'xqnci g'342499XCE'ÉTcvgf 'hqt 'vug'lp'f co r 'hqcwkp'u'ÉUqkf 'ucv'ej cti lpi " cpf 'uy kej lpi 'ÉDtqy pqw'r tqv'ekp'ÉDcwt { 'hry 'xqnci g'f lueqppge'ÉQxgtmcf "cpf " uj qt'v'ekw'r tqv'ekp'ÉCE'r qy gt 'lpf lecvt'cpf 'vug'uy kej 0

### LAMPS

Nqpi 'hlg.'gpgti { 'ucx'lp'i 'NGF'ico r u'ÉTgf 'qt'í tggp'NGF lrgwtu'ÉUki pu'eqpuwo g'hguu' j cp'3'y cwu0

### BATTERY

Long-life, maintenance-free, high performance nickel cadmium • Designed to operate over a wider range of temperature conditions (32°F-100°F recommended operating range) • Battery will operate sign for a minimum of 90 minutes in the event of a power outage.

**CODE COMPLIANCE** UL924 • Damp location rated • NFPA 101 Life Safety Code compliant • NEC and OSHA compliant •

### WARRANTY

5-year warranty. Product specifications subject to change without notice.

## INSTALLATION

### MOUNTING

May be top, end or back mounted • All signs include diecast aluminum canopy and mounting hardware for easy top or end mount installation • Backplate includes universal mounting pattern knockouts for simple J-box mounting




## ORDERING INFORMATION

model	operation	# faces	color (Letters)	color (Housing)	options
ARS	A = AC Only	1 = Single	R = Red	BB = All Black	WUC"= Cuugo dngf 'lp'WUC
	B = Battery Backup	2 = Double	G = Green	WW = All White	
				AA = All Brushed Aluminum	

Notes

<sup>1</sup> Order as separate line item. Field installation

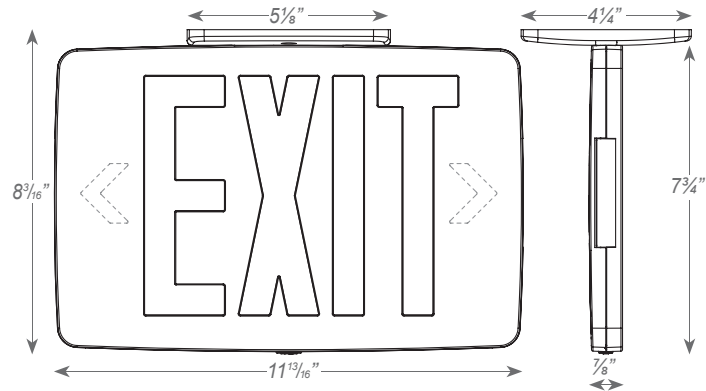

## ACCESSORIES<sup>1</sup>

ACCESSORY	DESCRIPTION
WG2	Wire Guard (wall mount)
WG3	Wire Guard (ceiling mount)
VRS1	Polycarbonate Vandal Shield

Ordering Example: ARS-B-1-R-AA-USA