AUTO-VOLTAGE SENSING LED REMOTES

PROJECT:
FIXTURE TYPE:
LOCATION:
CONTACT/PHONE:

The Auto-Voltage Sensing LED remote heads are an installers best friend. These LED heads automatically identify voltage configurations from 3.6V to 12V. The remote heads are available in a high impact, flame resistant thermoplastic or a die-cast housing complete with a mounting canopy.

BENEFITS & FEATURES

- Runs off of any 3.6 - 12 Volt Battery Source
- High Performance Chrome-Plated Metalized Reflector
- White Thermoplastic, 5VA Flame Retardant Housing (Indoor)
- Gray or Black Thermoplastic, 5VA Flame Retardant or Gray Diecast Housing (Outdoor)
- Impact Resistand Plastic Fresnel Lens (Indoor)
- Fresnel Glass Lens (Outdoor)
- Fully-Adjustable, Increases Center-to-Center Spacing
- 1W Standard with 8 LEDs
- High Output Option: 1.5W with 12 LEDs
- 85 Lumens per Lamp Head
- 3.6VDC - 12VDC Operation
- Universal Mounting Base Fits Single Gang J-Box
- Suitable for Wall or Ceiling Mount
- UL Listed with Approved Lighting Products
- Five Year Warranty

ASRLED1

ASRLED2

ASRLED1-WP (WP-DC)

ASRLED2-WP (WP-DC)

ASRLED1-WP-BL

ASRLED2-WP-BL

Indoor

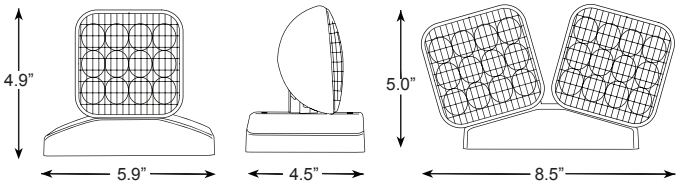

Outdoor (WP Option)

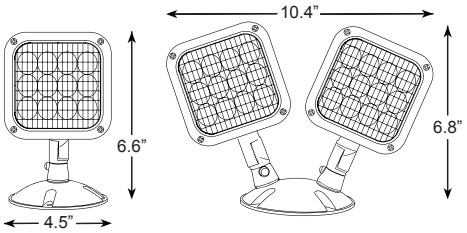

ORDERING INFORMATION

MODEL #	# HEADS	VOLTAGE RANGE	APPLICATION	HOUSING	OPTIONS
ASRLED1	1	3.6 - 12 VOLT	INDOOR	THERMOPLASTIC / WHITE	HL = HIGH OUTPUT
ASRLED2	2	3.6 - 12 VOLT	INDOOR	THERMOPLASTIC / WHITE	(1.5W WITH 12 LEDS)
ASRLED1-WP	1	3.6 - 12 VOLT	OUTDOOR	THERMOPLASTIC / GRAY	SDT = For Use With Fixtures
ASRLED2-WP	2	3.6 - 12 VOLT	OUTDOOR	THERMOPLASTIC / GRAY	With A Self-Diagnostic Option
ASRLED1-WP-BL	1	3.6 - 12 VOLT	OUTDOOR	THERMOPLASTIC / BLACK	
ASRLED2-WP-BL	2	3.6 - 12 VOLT	OUTDOOR	THERMOPLASTIC / BLACK	
ASRLED1-WP-DC	1	3.6 - 12 VOLT	OUTDOOR	DIE-CAST ALUMINUM	
ASRLED2-WP-DC	2	3.6 - 12 VOLT	OUTDOOR	DIE-CAST ALUMINUM	

SPACING GUIDES

ASR-LED-2

3FT PATH SPACING

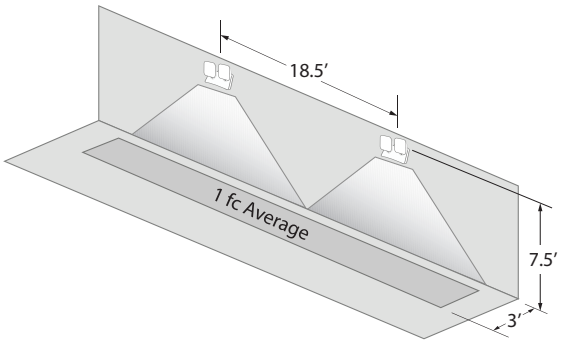
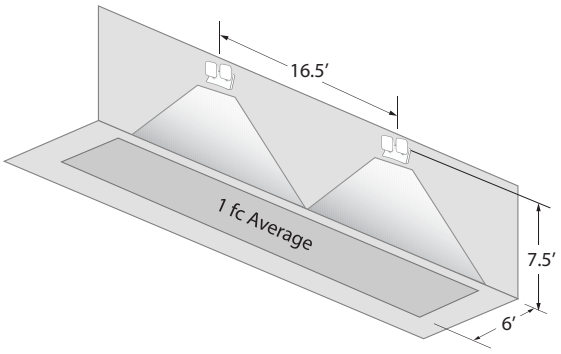
6FT PATH SPACING