



CRS Series Edge-Lit Surface Mount Exit Sign



PROJECT: _____
 FIXTURE TYPE: _____
 LOCATION: _____
 CONTACT/PHONE: _____



PRODUCT DESCRIPTION

The CRS Surface Mount Edge Lit Exit Sign is field adjustable for wall or ceiling mount. The edge-lit panel is constructed of high-grade acrylic with custom graphics and directional arrows to point towards the exit direction. Ultra high output LEDs produce brilliant graphic illumination well above code minimums.

FEATURES


- Extruded aluminum LED lamp housing mounts to a form-fitting canopy in solid aluminum that contains a "cam lock" device, which is field adjustable for wall or ceiling mount.
- Standard finishes: Satin white enamel and brushed aluminum. Optional finishes: Painted colors in any custom shade, or anodized finishes in satin bronze, polished gold, mirror silver & many others.
- Diamond polished acrylic lenses for optimum light transmission, exterior quality and high brightness.
- Ultra high output LEDs with up to 5 candela output in green or red produce brilliant graphic illumination well above code minimums.
- An advanced microprocessor monitors all charger functions and battery condition continuously, with software to automatically perform all tests and visual indications required by UL Standard 924 and NFPA 101

ELECTRONICS

- Self-Test/Self-Diagnostic operation standard in battery backup versions.
- Low Voltage Disconnect prevents deep battery discharge
- Universal 120/ 277 VAC input for standard battery or AC unit, or 24 VDC input for remote configuration.
- Power supply is surge and spike protected.
- The complete power supply module with optional NICAD battery pack is sealed within a plastic enclosure. AC and DC wiring is quickly attached with plug connectors.
- Standard Operating Temperature: 0°C to 50°C

MOUNTING

- Field selectable wall or ceiling mount. No exposed hardware.



CODES

- Manufactured and tested to UL Standard 924, NFPA Life Safety Code 101, and certified to IP66.

WARRANTY

- 5 year total customer satisfaction warranty.



ORDERING INFORMATION

Model	Operation	No. of Faces	Letter Color	Background Color	Trim Finish	Arrow Directions	Mount	Options
CRS	BB= Battery Backup	1 = Single	R= Red	C = Clear	W = White	NA = No Arrow	TW= Universal	See page 2
	NB= No Battery (AC Only)	2 = Double	G = Green	M = Mirror	K = Black	AB= Arrow Both <>	Top or Wall	
				W = White	A = Alum	AR= Arrow Right >	Mount	
				K = Black	B = Satin Bronze	AL= Arrow Left <		
				X = Custom	X = Custom	<u>Double Face Signs</u>		
						NA= No Arrow		
						LR= Single Arrow >		
						AB= Arrow Both <>		
						CX = Custom Graphics		

Ordering Example: CRS-BB-1-R-C-B-NA-TW-DG



CRS Series
Edge-Lit Surface Mount Exit Sign



PROJECT: _____
 FIXTURE TYPE: _____
 LOCATION: _____
 CONTACT/PHONE: _____

SUGGESTED SPECIFICATIONS

Install Mule Lighting's CRS recessed LED exit signs, available as unit equipment. The lamp housing and canopy shall be of extruded aluminum, graphic lenses shall be optical grade acrylic with diamond polished edges. Lighting uniformity shall be better than 4:1 when measured over any illuminated area and average brightness will exceed 6 ft Lambert (21 Cd/m²). Life expectancy of the LEDs shall be in excess of 20 years. The power supply and charger shall be an isolated digital type with regulated current and voltage output to the lamp load and batteries (emergency models). AC supply shall be universal 120/277 VAC input via two-wire feed. One standard power supply shall be capable of driving up to 5 single face remote signs in addition to the master, with emergency operation at least 90 minutes for each sign. Battery charge-time to restore full capacity after discharge shall be less than 24 hours.



OPTIONS

CODE

Auto Battery Diagnostics -----	DG
Damp Location -----	DP
Dual AC Input (120 VAC) -----	DAC120
Dual AC Input (277 VAC) -----	DAC277
2 Hour Emergency Operation -----	2EM
End Mount (Left/ Right) -----	LE/RE
Pendant Mount 12" -----	PEN
Pendant Mt (Custom Length) -----	PENX
Mullion Mount -----	MM
Inverted Graphics -----	INV

NOTE: PRE- INSTALL 4" X 4" X 2 1/8" DEEP J- BOX WITH 1 1/2" EXTENSION RING FOR BB & NB MODELS

MOUNTING DATA & DIMENSIONS:

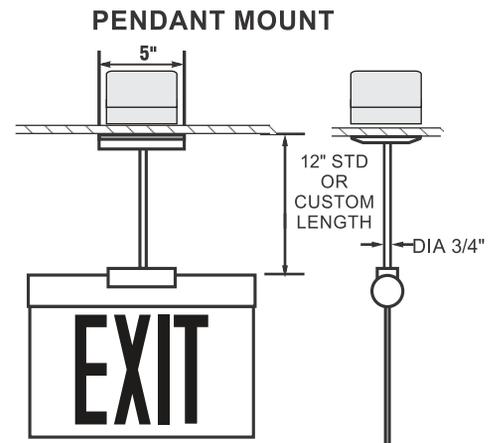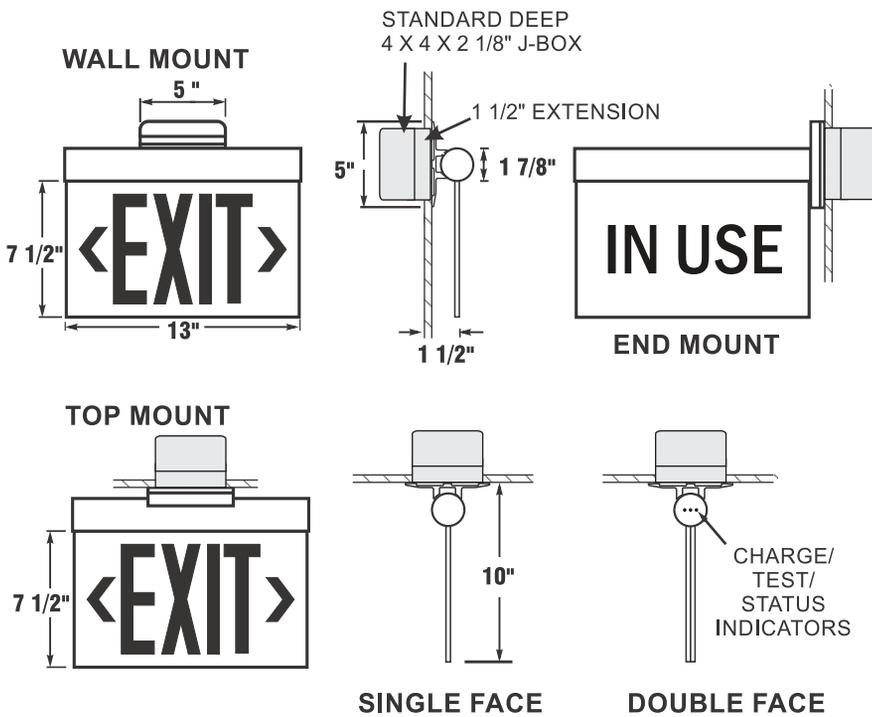

Inverted Surface Mount (CRS-INV)

Application: Inverted exit legend & canopy mount provide a perfect solution to difficult mounting situations.

BATTERY DIAGNOSTIC FUNCTIONS:
 Microprocessor programmed to perform tests as follows:

Continuous Monitoring w/ 1 Second Sampling	Every 28 Days	Every 12 Months
Lamp Connections	Transfer switch function	Full 90 minute emergency operation test with test/ fail and manual report signal
Battery Connections	Battery discharge rate under full load	Test switch indicator function


SELF-TEST DIAGNOSTIC FUNCTIONS

LOAD SPECIFICATIONS FOR CENTRAL BATTERY SYSTEM

FIXTURE	EPR (Watts)
CRS1RE	2
CRS2RE	4

EPR= Emergency Power Rating for Battery

STATUS	LED DISPLAY
NORMAL MODE	OFF
FAILED LAMP	GREEN
FAILED CHARGER	RED
FAILED TRANSFER	ORANGE
FAILED BATTERY	RED FLASH
FAILED ANNUAL TEST	ORANGE FLASH

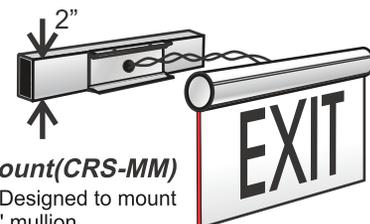

Mullion Mount(CRS-MM)

Application: Designed to mount directly to a 2" mullion.