



CEU SERIES
LOW PROFILE ALL LED EXIT & EMERGENCY COMBO



PROJECT: _____
 FIXTURE TYPE: _____
 LOCATION: _____
 CONTACT/PHONE: _____



ELECTRICAL

- Dual 120V/277 voltage standard. Optional dual 120V/230V available.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).
- 3.6V long life, maintenance-free, rechargeable Ni-Cd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

OPTIONS

- SPV: UL Listed for special voltage option.
- HL: Provides increased center-to-center spacing (2.0W per head).
- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes. Universal 120-277 voltage.
- RC: Remote capacity of up to 1.0 watts.

MOUNTING


- EZ-snap thermoplastic mounting canopy included – provides top or end mount.
- Universal K/O pattern on back plate for wall mount.

WARRANTY & LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- UL Listed for damp locations (0°C – 40°C).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Certified to CEC under Title 20 Regulations.



DIMENSIONS

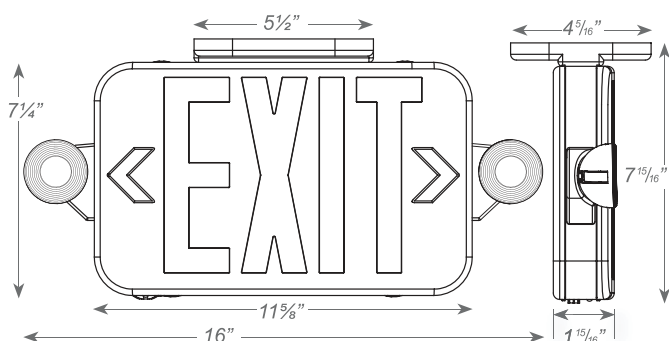

ILLUMINATION

- Adjustable long lasting, efficient ultra bright white LED lamp heads.
- One, 0.5W white LED per lamp head.
- Unique all inclusive lamp, reflector and lens assembly.
- Long-lasting, energy efficient Red or Green LED EXIT sign illumination.

HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact, thermoplastic in white or black finish.

ORDERING INFORMATION

| Model | No. of Faces | Letter Color | Housing Color | Options |
|-------|-----------------------|----------------|---------------|---|
| CEU | 3 = Universal Single/ | R = Red | W = White | RC = Remote Capacity ¹ |
| | Double Face | G = Green | B = Black | HL = High Lumen LED ¹ |
| | | RG = Red/Green | | SDT = Self-Diagnostics ² |
| | | | | SPV = 120/230 Volt 50/60Hz ² |

¹ HL and RC options cannot be combined. 0.5W of remote capacity available standard with HL option
² Not available with RG units.

ORDERING EXAMPLE: CEU3RW



CEU SERIES
LOW PROFILE ALL LED EXIT & EMERGENCY COMBO



PROJECT: _____
 FIXTURE TYPE: _____
 LOCATION: _____
 CONTACT/PHONE: _____

ELECTRICAL INFORMATION

| CATALOG NUMBER | INPUT WATTS (W) | | | INPUT AMPS (A) | | |
|---------------------|-----------------|------|------|----------------|------|------|
| | 120V | 230V | 277V | 120V | 230V | 277V |
| CEU RG | 1.2 | N/A | 1.2 | 0.12 | N/A | 0.12 |
| CEU RG RC/HL | 1.2 | N/A | 1.2 | 0.12 | N/A | 0.12 |
| CEU RED/GREEN | 1.2 | 1.2 | 1.2 | 0.12 | 0.12 | 0.12 |
| CEU RED/GREEN RC/HL | 1.2 | 1.2 | 1.2 | 0.12 | 0.12 | 0.12 |
| CEU RED SDT | 2.5 | - | 2.5 | 0.05 | - | 0.05 |
| CEU RED SDT RC/HL | 3.0 | - | 3.0 | 0.05 | - | 0.05 |
| CEU GRN SDT RC/HL | 2.7 | - | 2.7 | 0.05 | - | 0.05 |

REMOTE LAMP COMPATIBILITY

| MODEL NUMBER | BATTERY | REMOTE CAPACITY | COMPATIBLE REMOTE HEAD FAMILY | |
|--------------|---------|-----------------|-------------------------------|--------|
| | | | ASRLED | MRHLED |
| | | | MV | |
| CEU-RC | 3.6V | 1W | x | x |
| CEU-HL | 3.6V | 0.5W | | x |