



CANADA SERIES – SQ-Running Man

PLASTIC LED RUNNING MAN SIGNAGE



PROJECT: _____
 FIXTURE TYPE: _____
 LOCATION: _____
 CONTACT/PHONE: _____

PRODUCT DESCRIPTION

The Mule running man combo units feature an attractive, durable impact resistant thermoplastic housing design that is ideal for commercial and institutional installations. The slim profile of this sign blends perfectly with current interiors. The sign is configured with high-output LED's in a self-powered operation version and two 1 watt LED heads. The sign is supplied with 120/347VAC.

PRODUCT SPECIFICATIONS

CONSTRUCTION

The sign is constructed with a impact resistant thermoplastic housing. The sign comes standard with a white finish. Universal mounting pattern and key hole slots are stamped into the backplate. The self-powered version comes standard with an external LED status indicator and test switch. Two fully adjustable LED heads standard. Universal single or double face.

ELECTRICAL

SELF POWERED: STANDARD 120/347VAC input and sealed nickel-cadmium batteries to provide a minimum Of 90 minutes of emergency duration. Solid state charger and transfer. CSA C22.2 No. 141 Performance Certified. Solid state charging and switching. AC power indicator and test switch. Draws 4.0 Watts at 120VAC and 2.9 Watts at 347VAC.

BATTERY

The sign is designed with a maintenance free, nickel-cadmium battery that provides a minimum emergency duration of 90 minutes. Recharge time of the battery is twenty-four (24) hours.

CODE COMPLIANCE

CSA Certified. CSA C22.2 No. 141 Performance Certified.

INSTALLATION

The signage is suitable for surface ceiling, wall and end mounting. Suitable for indoor and damp installations. Operating Temp: 10C to 40C

ORDERING INFORMATION


MODEL	LIGHT SOURCE	FACE COLOR	# FACES*	MOUNTING	OPTIONS
SQ-RMAN	L = LED	G = GREEN	U = UNIVERSAL	U = UNIVERSAL	WG = WIRE GUARD

Example: SQ-RMAN-L-G-U-U

*Universal Face offers complete installation flexibility w/ canopy, backplate and three (left, right, and no arrow) pictogram legends per face.



DIMENSIONS

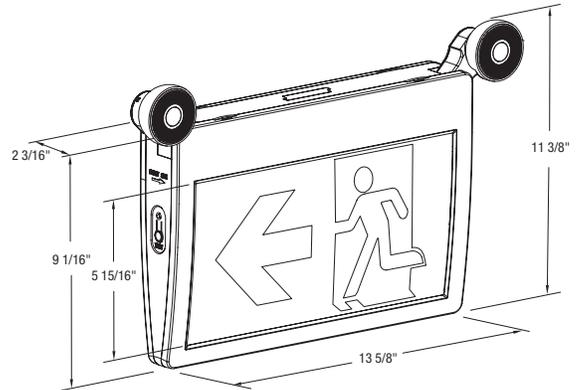

Comes standard with three pictogram legends for direction selection.