




# E-1 LED LOW PROFILE THERMOPLASTIC EMERGENCY UNIT



PROJECT: \_\_\_\_\_  
 FIXTURE TYPE: \_\_\_\_\_  
 LOCATION: \_\_\_\_\_  
 CONTACT/PHONE: \_\_\_\_\_



## DIMENSIONS

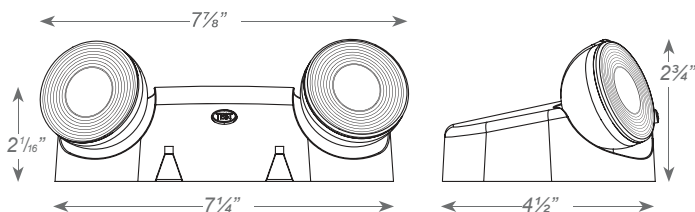

## ILLUMINATION

- Adjustable long lasting, efficient, ultra bright white LED lamp heads.
- One, 0.5 watt white LED per lamp head.
- Unique all-inclusive lamp, reflector and lens assembly.

## HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.

## MOUNTING

- Suitable for wall or ceiling mount.
- Universal knockout pattern on back plate for surface mount.

## ELECTRICAL

- Dual 120/277 voltage standard. Optional dual 120/230 voltage available.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).
- 3.6V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

## OPTIONS

- RC: Remote capacity of up to 1.0 watt.
- SPV: UL listed for 120/230 Volt, 50/60 Hz.

## WARRANTY & LISTING

- One year warranty on all electronics and housing. Battery prorated for one year.
- UL Listed for damp locations (0°C – 40°C).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Certified to CEC under Title 20 Regulations.

## ORDERING INFORMATION

| Model | Housing Color                | Options  |
|-------|------------------------------|--|
| E-1   | (blank) = White<br>B = Black | RC = Remote Capacity<br>SPV = 120/230 Volt 50/60Hz |

Example: E-1

