



ERD EMLD SERIES

Recessed LED Down Light



PROJECT: _____
FIXTURE TYPE: _____
LOCATION: _____
CONTACT/PHONE: _____



PRODUCT DESCRIPTION

With spacing up to 55 ft in 9 ft ceilings, this recessed down light with a 4" trim is our most efficient emergency luminaire; very effective in long corridors, it is inconspicuous and will blend with general lighting fixtures without affecting the appearance of ceiling layouts.

FEATURES

- Dual function operation for Night or Security lighting as well as emergency lighting.
- Over 50,000 hour lamp life in normal use.
- Self-Test Diagnostics is standard
- Normal-on switch allows timed control of night lighting
- Wide lighting distribution, Standard CRI 5000K.
- Universal 120/277 VAC input for standard battery or AC unit.
- American manufactured major components comply with\ ARRA (American Recovery and Reinvestment Act) requirements and Buy American provisions.

CONSTRUCTION

- 4" Trim ring installation with standard can and back plate.
- Steel housing with bracket mount locations and multiple knockouts for wiring connection.

ELECTRONICS

- Self-Test/Self-Diagnostic operation is standard in battery backup versions.
- Line latch circuit prevents unwanted emergency activation at installation.
- Low Voltage Disconnect prevents deep battery discharge
- High efficiency charger and Li-ion Battery
- Standard Operating Temperature
 - BB: 0°C to 50°C
 - AC: -40°C to 50°C

CODES

- Manufactured and tested to UL Standard 924, NFPA Life Safety Code101.

WARRANTY

- 5 year total customer satisfaction warranty.



ORDERING INFORMATION

Model	Operation	Power	Trim Color	Options
ERD	BB = Battery Unit	BB Models:	W = Satin White	DAC = Dual AC Input (AC Models Only)
		7 = 7 Watts	BL = Black	DP = Damp Location
	AC = AC Supply (120/277V)	10 = 10 Watts	A = Aluminum	
		AC Models:	DB = Dark Bronze	
		4 = 4 Watts	X = Custom	
		7 = 7 Watts		

EXAMPLE: ERD-BB-10-A-DP



ERD EMLD SERIES

Recessed LED Down Light



PROJECT: _____
FIXTURE TYPE: _____
LOCATION: _____
CONTACT/PHONE: _____

SUGGESTED SPECIFICATIONS

Install EMLD Series ERD Recessed LED downlight emergency lighting fixture manufactured by Mule Lighting, Inc., available as unit equipment. Upon loss of AC building power, emergency models shall operate for a minimum of 90 minutes in compliance with UL 924 and NFPA LSC Code 101. The unit may be specified to operate continuously for security or night lighting, as required.


SPACING

Model	Mtg. Ht.	SPACING		
		Path of Egress Width		
		3 Ft.	6 Ft.	10 Ft.
7 W	9'	50'	40'	25'
10 W	9'	55'	50'	40'

NOTE: TESTED IN ACCORDANCE WITH IES STANDARD LM-79-08 FOR SOLID STATE LIGHTING PRODUCTS. FOR REFERENCE ONLY. STANDARD REFLECTANCES 80/50/20. MULE IS NOT RESPONSIBLE FOR SPECIFIC CONDITIONS THAT MAY ALTER THE RESULTS. COMPLETE IES PHOTO-METRIC DATA AVAILABLE AT WWW.MULELIGHTING.COM FOR YOUR CONVENIENCE.


CONTACT MULE FOR LAYOUT ASSISTANCE

Code Compliant Emergency lighting layouts provided free of charge!

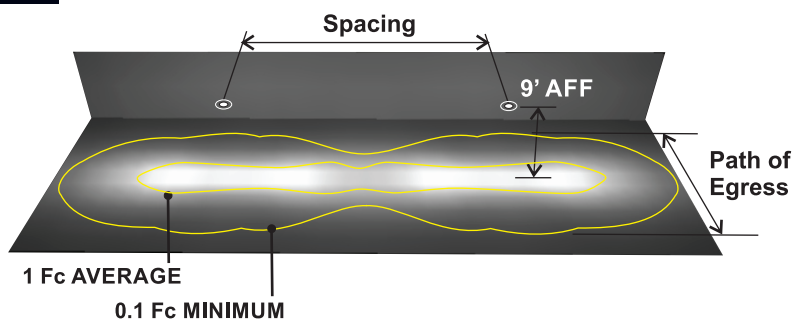


MOUNTING DATA & DIMENSIONS

AC Models

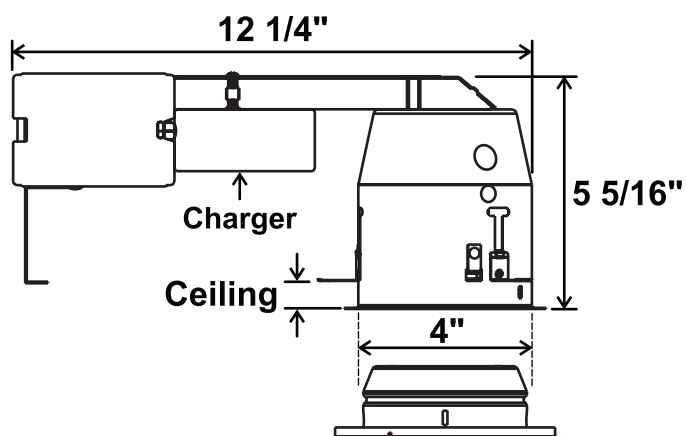

Battery Backup Models

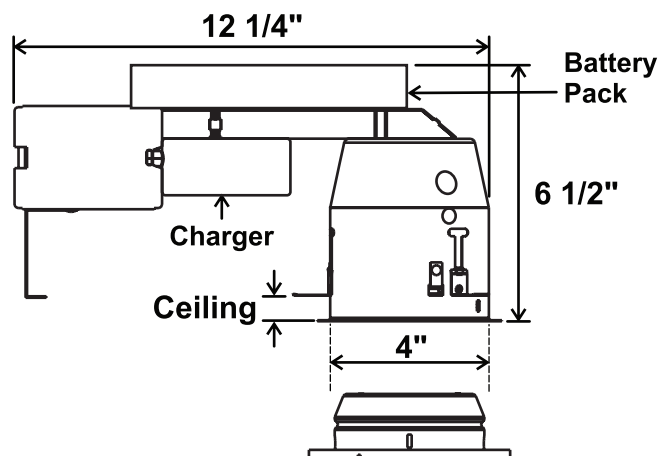

SELF-TEST DIAGNOSTIC FUNCTIONS BB MODELS

STATUS	LED DISPLAY
NORMAL FULL CHARGE	GREEN ON
NORMAL FAST CHARGE	ORANGE ON
FAILED BATTERY	RED FLASH FAST
FAILED LAMP	GREEN FLASH
FAILED TRANSFER	ORANGE FLASH
FAILED CHARGER	RED FLASH SLOW