



# E-STAR Series

CONTRACTOR GRADE STEEL LED EXIT



PROJECT: \_\_\_\_\_  
 FIXTURE TYPE: \_\_\_\_\_  
 LOCATION: \_\_\_\_\_  
 CONTACT/PHONE: \_\_\_\_\_

## PRODUCT DESCRIPTION

E-Star Series Steel LED Exit Signs offer long lamp life, energy efficiency and uniform illumination in a sleek yet rugged design. Possessing premium installation features such as a simple screw-on canopy, along with knockout chevron directional indicators, the E-Star Series is ideal for applications that require the durability of metal construction in an economical package. All E-Star Series signs include a second faceplate and canopy for universal installation.

## PRODUCT SPECIFICATIONS

### CONSTRUCTION

Rugged, heavy duty 20-gauge die-formed steel construction • Universal mounting pattern knockouts in backplate for back mounting • Second faceplate included for double face applications • 6" letters with 3/4" stroke width • Chevron directional indicator knockouts • Red or green letters • Corrosion-resistant polyester powder coat paint • White or black finish.

### ELECTRICAL

F wnl'xqnci g'342 H99XCE 'ÉTcvgf 'hqt 'vug'lp'f co r 'r'qecv'kpu'ÉUqrk' 'ucv'g'ej cti lpi " cpf 'ly ksj lpi 'ÉDtqy pqw'r tqv'ev'kqp 'ÉDcvgt { 'rny 'xqnci g'f lueqpp'ge'ÉQxgt'rcf " cpf 'lj qt v'ek'ew'r tqv'ev'kqp 'ÉCE' r qy gt'lpf k'ecvt'cpf 'g'uv'ly ksj 0

### LAMPS

Nqpi 'ihg' 'gp'gti { 'ucx'kpi 'NGF' 'rco r u'ÉT'gf 'qt' i tggp'NGF l'rgwtu'ÉUki pu'eqpuwo g'rguu' yj cp'6'y cwu0


### BATTERY

Long life, maintenance-free, high performance nickel cadmium • Designed to operate over a wider range of temperature conditions (32°F-100°F recommended operating range) • Battery will operate sign for a minimum of 90 minutes in the event of a power outage.

CODE COMPLIANCE WN; 46'ÉF co r 'r'qecv'kqp'cv'gf 'ÉP HRC'323'Nhg'U'ch'v' 'Eqf'g' eqo r r'kcpv'ÉP GE'cpf 'QU' C'eqo r r'kcpw'

### WARRANTY

5-year warranty. Product specifications subject to change without notice.

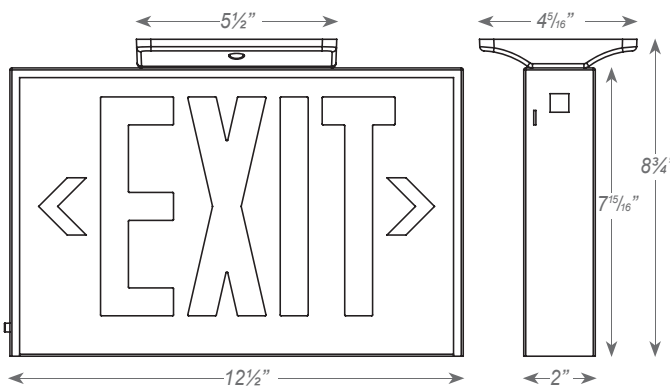

## INSTALLATION

### MOUNTING

May be top, end or back mounted • All signs include canopy and mounting hardware for easy top or end mount installation • Backplate includes universal mounting pattern knock-outs for simple back mounting.



## ORDERING INFORMATION

model	# of faces	color code	options	æ&•[ ã• <sup>3</sup>
SX = AC Only	1/2C = Universal <sup>1</sup>	WWR = Red Letters/White Housing	SD <sup>2</sup> = Self-Diagnostics	Y I 4"= Y kg'I wctf 'm'y cni'o qwpv+
PSX = Battery Backup		WWG = Green Letters/White Housing	UN <sup>3</sup> = Ur g'elcn'Ngwt'kpi	Y I 5"= Y kg'I wctf 'm'eg'k'ng'o qwpv+
		BBR = Red Letters/Black Housing	WUC <sup>3</sup> = Cuugo drgf 'lp'WUC	VRs1 <sup>3</sup> = Polycarbonate Vandal Shield
		BBG = Green Letters/Black Housing		PKsX1 <sup>3</sup> = 1ft Pendant Mount Kit
				PKsX2 <sup>3</sup> = 2ft Pendant Mount Kit

### Notes

<sup>1</sup> Universal includes 2nd exit face, backplate and canopy

<sup>2</sup> Not available on AC units

<sup>3</sup> Order as separate line item. Field installation

Ordering Example: PSX-1/2C-WWR