



EVER-BRITE® P50 RUNNING MAN



PROJECT: _____
 FIXTURE TYPE: _____
 LOCATION: _____
 CONTACT/PHONE: _____

FEATURES

- Zero energy consumption- zero cost, green design
- Zero maintenance- no bulbs, no battery replacement
- Non-toxic, non-radioactive
- No disposal costs
- Designed for surface flag, ceiling or conduit mounting
- Can be used for both high-level and low-level applications
- Easily movable if egress path changes
- Thin, low profile construction
- Consistent, uniform illumination
- 15.25 m rated, visibility, readability
- Recyclable
- LEED point contributor

TECHNICAL INFORMATION

Sizes:

- Aluminum Framing system-RM with arrow- 43.8 cm x 25.4 cm x 1.9 cm
- Aluminum Framing system-RM- 25.4 cm x 25.4 cm x 1.9 cm
- Acrylic Framing system- RM with arrow- 41.275 cm x 30.48 cm x 2.54 cm
- Acrylic Framing system- RM- 30.48 cm x 23.5 cm x 2.54 cm
- Illumination: High Visibility Green
- Rated Viewing Distance: 15.25 meters
- Directional: Included-Running Man with or without arrow
- Construction: Aluminum Framing System or Acrylic face with aluminum extrusion
- Durability: Explosion-proof/Suitable for Floor Proximity Installation

TESTS PASSED

- CAN/ULC S572
- Standard for Photoluminescent and Self Luminous Exit Signs and Path Marking Systems
- Meets NBC 2010/2015
- 21.6 lx at 30 minutes Listing for LED, Fluorescent, Metal Halide, Mercury Vapor
- 54 lx at 120 minute Listing for Fluorescent, Metal Halide, Mercury Vapor

LIFE EXPECTANCY

25+ Years

POWER REQUIREMENTS

NO additional electrical or mechanical source required


APPLICATIONS

- Both high-level and low location.
- Suitable for floor proximity installation.

ORDERING INFORMATION

Catalog #	RM	RM Facing	Arrow	Min. Illum.	Frame	No. of Faces	Mounting Bracket
72	30 = no arrow 31 = with arrow	L = Left R = Right	A = Arrow	2 = 21.6 lx 5 = 54 lx	SAF = Silver Aluminum ACR= Acrylic	2 = Double sided	B

Photoluminescent Background

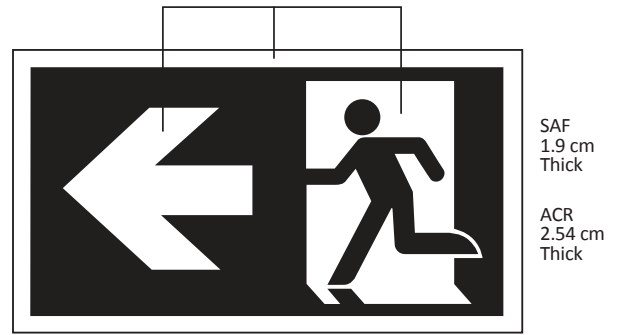

Aluminum Framing System Ceiling Mount Option



Acrylic Framing System Ceiling Mount Option



Acrylic Framing System Flag Mount Option



INSTALLATION

Surface, flag or ceiling mounted. Before installation it must be determined that there is a minimum of 21.6 lx LED or 54 lx of light on the face(s) of the sign at all times during building occupancy.

