



**FEATURES**

- Zero energy consumption - zero cost, green design
- Zero maintenance - no bulbs, no battery replacement
- Non-toxic, non-radioactive
- No disposal cost
- Designed for surface, flag, ceiling or conduit mounting
- Can be used for both high-level and low-level applications
- Movable if egress paths change
- Thin, low profile construction
- Consistent, uniform illumination
- Visible at 100 feet
- Recyclable
- LEED points qualified
- Listed for indoor /outdoor and wet locations
- LED or fluorescent light activation

**TECHNICAL INFORMATION**

Sizes: 15-7/8" x 8-5/8" x 3/8"  
 Letter size: 7"  
 Background: Black, Red, Green  
 Illumination: High Visibility Green  
 Visibility: 100 feet  
 Directional: 2 included (Field Applied)  
 Construction: ABS Plastic panel/photoluminescent lettering  
 Durability: Explosion-proof for areas requiring explosion-proof exit signage

**TESTS PASSED**

UL 924 Emergency Lighting and Power Equipment listed by UL Meets NFPA Life Safety Code 101 and OSHA requirements: International Building and Fire Code 2009, 2012, 2015  
 Listed for LED lighting

**LIFE EXPECTANCY**



25+ Years

**POWER REQUIREMENTS**

NO additional electrical or mechanical source required

**APPLICATIONS**

Both high-level and low location.  
 Suitable for floor proximity installation.

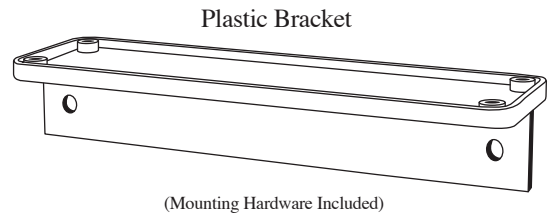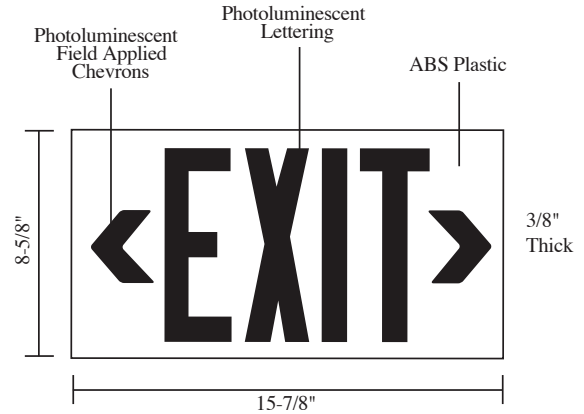

Flag Mount Option



Ceiling Mount Option

**INSTALLATION**

Surface, flag or ceiling mounted (hardware included). Before installation it must be determined that there is a minimum of 5 FC of LED or fluorescent light on the face(s) of the sign at all times during building occupancy. (Conduit bracket sold separately.)

**ORDERING INFORMATION**

Catalog #	Frame Color	No. of Faces	
70	7 = Red 8 = Green 9 = Black	0 = Single sided 2 = Double sided	B = Mounting Bracket CDT-B = Conduit Bracket

