




EVER-BRITE® P50 EXIT SIGNS



PROJECT: _____
 FIXTURE TYPE: _____
 LOCATION: _____
 CONTACT/PHONE: _____

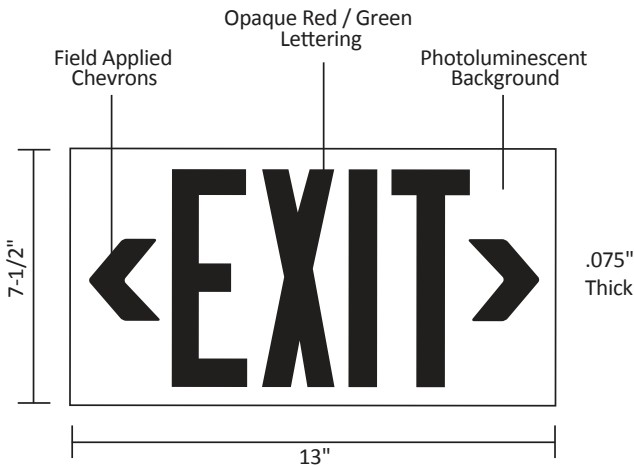

Aluminum Framing System Ceiling Mount



Acrylic Framing System Ceiling Mount

FEATURES

- Requires no additional electricity to operate
- Can be used for both high-level and low-level applications
- Requires virtually no maintenance, periodic inspections, for 25+ years
- Thin, low profile construction
- Reliability
- Non-toxic, non-radioactive
- Low-cost, easy installation
- Designed for surface mounting
- Consistent, uniform illumination
- Visible at 50 feet
- Saves on energy cost

TECHNICAL INFORMATION

Sizes: 7.5" x 13" x .075"
 Letter size: .8125" stroke with 6" height
 Background: Photoluminescent
 Illumination: High Visibility Green
 Visibility: 50 feet
 Directional: 2 included (field applied)
 Construction: Plastic photoluminescent panel/red or green lettering with acrylic or aluminum frame
 Durability: Explosion-proof for areas requiring explosion-proof exit signage

TESTS PASSED

UL 924 Emergency Lighting and Power Equipment Listed through UL; Meets NFPA Life Safety Code 101 and OSHA requirements; International Building Code 2009/2012/2015 International Fire Code 2009/2012/2015 Listed for LED lighting

LIFE EXPECTANCY

25+ Years

POWER REQUIREMENTS

NO additional electrical or mechanical source required

INSTALLATION

Surface, flag or ceiling mounted (hardware included). Before installation it must be determined that there is a minimum of 5 Fc of LED, Fluorescent, metal halide or mercury vapor light on the face(s) of the sign at all times during building occupancy. (Conduit bracket sold separately.)

APPLICATIONS

Both high-level and low location.
 Suitable for floor proximity installation.

ORDERING INFORMATION

Catalog #	Letter Style	Letter Color	Chevrons	Frame	No. of Faces	Mounting Bracket
7	2 = Printed Letters	1 = Red 2 = Green	0 = With Chevrons (field applied) included	SAF= Silver Aluminum ACR= Acrylic	blank = Single Sided 2 = Double Sided	B

