



# EVER-BRITE® P50 RUNNING MAN



PROJECT: \_\_\_\_\_  
 FIXTURE TYPE: \_\_\_\_\_  
 LOCATION: \_\_\_\_\_  
 CONTACT/PHONE: \_\_\_\_\_

## FEATURES

- Zero energy consumption- zero cost, green design
- Zero maintenance- no bulbs, no battery replacement
- Non-toxic, non-radioactive
- No disposal costs
- Designed for surface flag, ceiling or conduit mounting
- Can be used for both high-level and low-level applications
- Easily movable if egress path changes
- Thin, low profile construction
- Consistent, uniform illumination
- 15.25 m rated, visibility, readability
- Recyclable
- LEED point contributor

## TECHNICAL INFORMATION

Sizes:

- Aluminum Framing system-RM with arrow- 43.8 cm x 25.4 cm x 1.9 cm
- Aluminum Framing system-RM- 25.4 cm x 25.4 cm x 1.9 cm
- Acrylic Framing system- RM with arrow- 41.275 cm x 30.48 cm x 2.54 cm
- Acrylic Framing system- RM- 30.48 cm x 23.5 cm x 2.54 cm
- Illumination: High Visibility Green
- Rated Viewing Distance: 15.25 meters
- Directional: Included-Running Man with or without arrow
- Construction: Aluminum Framing System or Acrylic face with aluminum extrusion
- Durability: Explosion-proof/Suitable for Floor Proximity Installation

## TESTS PASSED

- CAN/ULC S572
- Standard for Photoluminescent and Self Luminous Exit Signs and Path Marking Systems
- Meets NBC 2010/2015
- 21.6 lx at 30 minutes Listing for LED, Fluorescent, Metal Halide, Mercury Vapor
- 54 lx at 120 minute Listing for Fluorescent, Metal Halide, Mercury Vapor

## LIFE EXPECTANCY

25+ Years

## POWER REQUIREMENTS

NO additional electrical or mechanical source required


## APPLICATIONS

- Both high-level and low location.
- Suitable for floor proximity installation.

## ORDERING INFORMATION

Catalog #	RM	RM Facing	Arrow	Min. Illum.	Frame	No. of Faces	Mounting Bracket
72	30 = no arrow 31 = with arrow	L = Left R = Right	A = Arrow	2 = 21.6 lx 5 = 54 lx	SAF = Silver Aluminum ACR= Acrylic	2 = Double sided	B


Photoluminescent Background

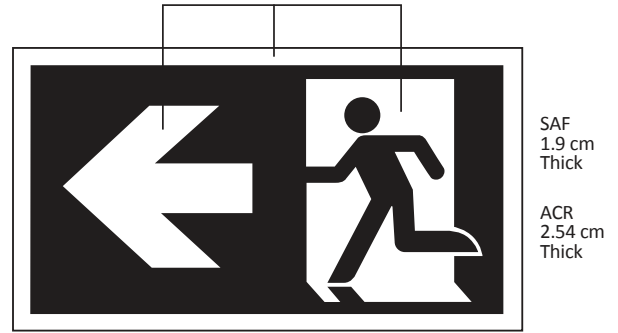

Aluminum Framing System Ceiling Mount Option



Acrylic Framing System Ceiling Mount Option

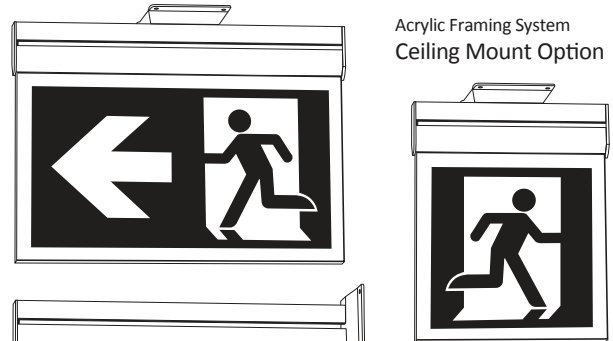

Acrylic Framing System Flag Mount Option



## INSTALLATION

Surface, flag or ceiling mounted. Before installation it must be determined that there is a minimum of 21.6 lx LED or 54 lx of light on the face(s) of the sign at all times during building occupancy.

