



FEATURES

- Zero energy consumption - zero cost, green design
- Zero maintenance - no bulbs, no battery replacement
- Non-toxic, non-radioactive
- No disposal cost
- Designed for surface, flag, ceiling or conduit mounting
- Can be used for both high-level and low-level applications
- Movable if egress paths change
- Thin, low profile construction
- Consistent, uniform illumination
- Visible at 100 feet
- Recyclable
- LEED points qualified
- Listed for indoor /outdoor and wet locations
- LED or fluorescent light activation

TECHNICAL INFORMATION

Sizes: 15-7/8" x 8-5/8" x 3/8"
 Letter size: 7"
 Background: Black, Red, Green
 Illumination: High Visibility Green
 Visibility: 100 feet
 Directional: 2 included (Field Applied)
 Construction: ABS Plastic panel/photoluminescent lettering
 Durability: Explosion-proof for areas requiring explosion-proof exit signage

TESTS PASSED

UL 924 Emergency Lighting and Power Equipment listed by UL Meets NFPA Life Safety Code 101 and OSHA requirements: International Building and Fire Code 2009, 2012, 2015
 Listed for LED lighting

LIFE EXPECTANCY



25+ Years

POWER REQUIREMENTS

NO additional electrical or mechanical source required

APPLICATIONS

Both high-level and low location.
 Suitable for floor proximity installation.

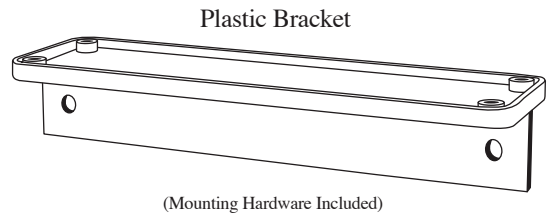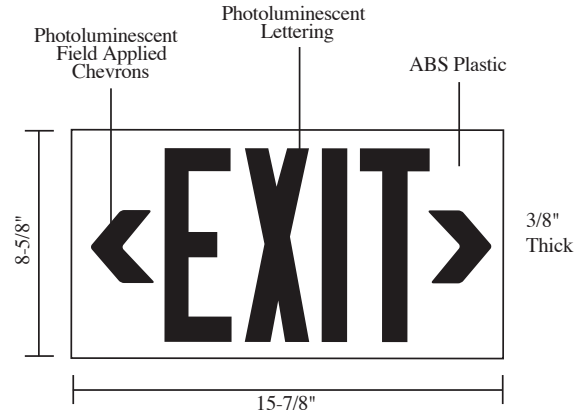

Flag Mount Option



Ceiling Mount Option

INSTALLATION

Surface, flag or ceiling mounted (hardware included). Before installation it must be determined that there is a minimum of 5 FC of LED or fluorescent light on the face(s) of the sign at all times during building occupancy. (Conduit bracket sold separately.)

ORDERING INFORMATION

Catalog #	Frame Color	No. of Faces	
70	7 = Red 8 = Green 9 = Black	0 = Single sided 2 = Double sided	B = Mounting Bracket CDT-B = Conduit Bracket

