



MERIDIAN Series

DIECAST ALUMINUM LED EXIT



PROJECT: _____
 FIXTURE TYPE: _____
 LOCATION: _____
 CONTACT/PHONE: _____

PRODUCT DESCRIPTION

The Meridian Series is the first universal LED die-cast aluminum exit sign available combining an appealing design, the latest in die casting technology and high performance electronics to ensure reliability. The architecturally pleasing design makes this series the premier choice for applications requiring the durability and the craftsmanship of die-cast aluminum exit signs. The unique curved face provides the brightest, most uniform illumination available in the industry and blends well with any setting providing a clean, modern look.

PRODUCT SPECIFICATIONS

CONSTRUCTION

Die cast aluminum housing and faceplate • Includes die cast aluminum canopy for top or end mounting • Universal mounting pattern knockouts for J-box mounting • Pre-drilled canopy attachment locations with easily removed hole covers • Integral wiring channels • Snap-fit faceplate • Accessory faceplate offered to field-convert from single to double face • 6" letters with 3/4" stroke width • Full-size 3/4" wide chevron directional indicators • Easily removable chevron directional indicators • Red or green letters • Available in a wide variety of finishes.

ELECTRICAL

F w n i x q n c i g 342 I 49 X C E ' E T c v g f ' h q t ' v u g ' l p ' f c o r ' r q e c v k p u ' E U q r k f ' u c v g ' e j c t i l p i " c p f ' u y k e j l p i ' E D t q y p q w ' r t q v g e v k p p ' E D c w g t { ' r q y ' x q n c i g ' f l u e q p p g e v ' E Q x g t r q c f " c p f ' l j q t ' v e k t e w k ' r t q v g e v k p p ' E C E ' r q y g t ' l p f l e c v q t ' c p f ' v g u v ' u y k e j 0

LAMPS

N q p i ' h k g ' g p g t i { ' u c x l p i ' N G F ' r o r u ' E T g f ' q t ' i t g g p ' N G F l r g w t u ' E U k i p u ' e q p u w o g ' h g u u ' j c p ' 3 ' y c w u 0


BATTERY

Long-life, maintenance-free, high performance nickel cadmium • Designed to operate over a wider range of temperature conditions (32°F-100°F recommended operating range) • Battery will operate sign for a minimum of 90 minutes in the event of a power outage.

CODE COMPLIANCE UL924 • Damp location rated • NFPA 101 Life Safety Code compliant • NEC and OSHA compliant • Meets the State of Minnesota energy efficiency requirements.

WARRANTY

5-year warranty. Product specifications subject to change without notice.

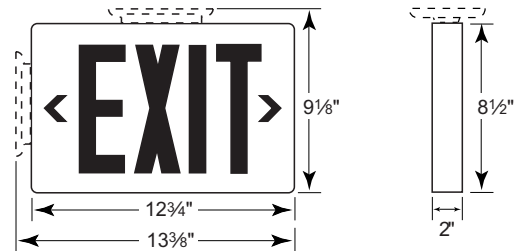

INSTALLATION

MOUNTING

May be top, end or back mounted • All signs include die cast aluminum canopy and mounting hardware for easy top or end mount installation • Backplate includes universal mounting pattern knockouts for simple J-box mounting

ACCESSORIES⁴

ACCESSORY	DESCRIPTION
WG2	Wire Guard (wall mount)
WG3	Wire Guard (ceiling mount)
VRS1	Polycarbonate Vandal Shield
PKMD1	1ft Pendant Mount Kit
PKMD2	2ft Pendant Mount Kit



ORDERING INFORMATION

model	operation	# faces	color (Letters)	color (Housing)	options
MD	A = AC Only	1 = Single	R = Red	BA = Black w/ Brushed face	SD ² = Self-Diagnostics
	B = Battery Backup	2 = Double	G = Green	WA = White w/ Brushed face	TP ³ = Tamper Proof Hardware
		U ¹ = Universal		BB = All Black	DLC ³ = Dual Circuit Input
Notes				WW = All White	WUC ⁴ = Cuugo drgf 'lp' WUC
				AA = All Brushed Aluminum	

¹ Universal includes 2nd exit face and backplate

² Not available on AC units

³ AC only, for use with inverter or generator applications only

⁴ Order as separate line item. Field installation

Ordering Example: MD-B-U-R-BA-TP