



RADIUS SERIES - MRD-WL-LED

COMMERCIAL GRADE WET LOCATION EMERGENCY LIGHT



PROJECT: _____
 FIXTURE TYPE: _____
 LOCATION: _____
 CONTACT/PHONE: _____

PRODUCT DESCRIPTION

The Mule MRD-WL-LED is ideal for wet locations, resistant to corrosive atmospheres, non-hazardous dust environments, and to water spray, splashing water or hose down locations. The adjustable LED lamps are enclosed in a fully gasketed, corrosive resistant fiberglass enclosure designed to withstand the harshest environments.

PRODUCT SPECIFICATIONS

CONSTRUCTION

Injection molded, engineering-grade, UV-retardant thermoplastic • UL94V-0 flame rating • Impact, scratch, and corrosion-resistant • Snap-fit housing and mounting plate • Universal mounting plate with quick-connect feature reduces installation labor • Fully gasketed clear polycarbonate cover offers protection against wet, non-hazardous dust, corrosive atmospheres, water spray and splashing water.

ELECTRICAL

Dual 120/277 voltage standard • Rated for use in damp locations • Solid state charging and switching • Brownout protection • Battery low voltage disconnect • Overload and short circuit protection • AC power indicator and test switch.

LAMPS

Supplied with LED Lamps
 Total Lumens: 116

HEADS

Includes two adjustable lighting heads • Contemporary semi-recessed round head design • High performance chrome-plated metallized reflector and plastic lens for optimal light distribution • Adjustable lamp heads provide optimal center-to-center spacing.

BATTERY


Maintenance-free Nickel-Cadmium battery • Standard battery will operate fixture for a minimum of 90 minutes in the event of a power outage

CODE COMPLIANCE

UL924 • UL Listed for wet locations (20°C - 50°C) • NFPA 101 Life Safety Code compliant • NEC and OSHA compliant

WARRANTY

5-year warranty on housing and electronics. 1-year on battery. Product specifications subject to change without notice.

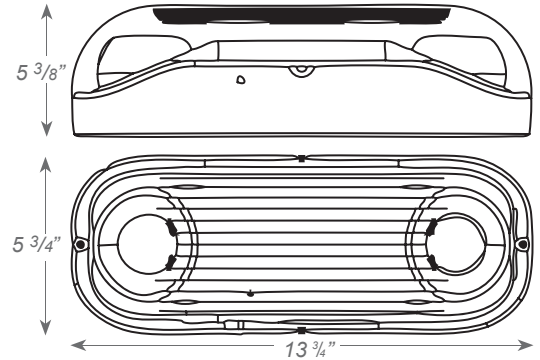

INSTALLATION

MOUNTING

Suitable for wall or ceiling mounting • Surface mount via knockouts on back of housing.



ORDERING INFORMATION

model	options
MRD-WL-LED	IH = Internal Heater (-20°C - 50°C)

ORDERING EXAMPLE: MRD-WL-LED