



MX Series

CONTRACTOR GRADE THERMOPLASTIC LED EXIT



PROJECT: _____
 FIXTURE TYPE: _____
 LOCATION: _____
 CONTACT/PHONE: _____

PRODUCT DESCRIPTION

The MX Series combines an ultra-slim polycarbonate housing and dependable Mule LED performance to give you a versatile all-in-one, 21st century design. This truly universal exit sign includes the canopy and extra faces for any application. Installation is accomplished in minutes with our tool-less, Snap-In™ design. Available with red or green energy efficient LED light sources to provide years of maintenance-free illumination at a minimal cost.

PRODUCT SPECIFICATIONS

CONSTRUCTION

Injection molded, engineering-grade, UV-stable thermoplastic • UL94V-0 flame rating • Impact, scratch, fade and corrosion-resistant • Durable unibody housing frame with integral wiring channel • Snap-fit faceplate and backplate • Second faceplate included for double face applications • 6" letters with 3/4" stroke width • Chevron directional indicators can be easily removed or reinserted as necessary • Red or green letters • White or black textured finish.

ELECTRICAL

Dual voltage 120/277VAC • Rated for use in damp locations • Solid state charging and switching • Brownout protection • Battery low voltage disconnect • Overload and short circuit protection • AC power indicator and test switch.

LAMPS

Long life, energy saving LED lamps • Red or green LED/letters • Signs consume less than 3 watts.

BATTERY

Standard exit sign supplied with NiCad battery, REM option supplied with lead calcium battery • Standard battery will operate sign for a minimum of 90 minutes in the event of a power outage • REM version will operate the sign plus an additional 3W of remote load • Temperature rating is 0-40 degrees C.

CODE COMPLIANCE

UL924 • Damp location rated • NFPA 101 Life Safety Code compliant • NEC and OSHA compliant • California Energy Commission (CEC) • Title 20 Compliant

WARRANTY

5-year warranty. Product specifications subject to change without notice.


INSTALLATION

MOUNTING


May be top, back or end mounted • All signs include quick-install snap-fit canopy and mounting hardware for easy top or end mount installation • Backplate includes universal mounting pattern knockouts for simple back mounting.



Standard Version

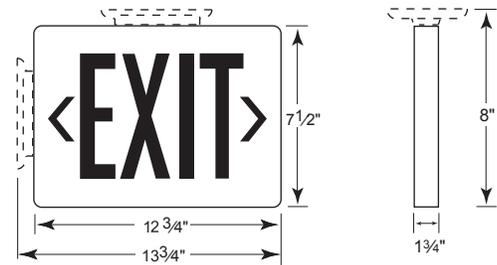

Optional REM Version

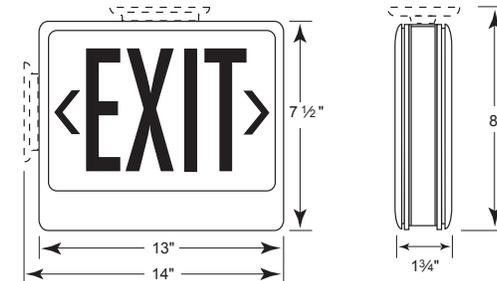

ORDERING INFORMATION

Model	Operation	Color (letters)	Faces	Options	Accessories ⁴
MX	A = AC Only	R = Red	U ¹ = Universal	SD ² = Self-Diagnostics	WWG-1 = Wire Guard (wall mount-white)
	B = Battery Backup	G = Green		BL = Black Housing	BPG2 = Wire Guard (wall mount)
				DLC-120 ³ (Dual Circuit with 120V input)	BPG3 = Wire Guard (ceiling mount)
				DLC-277 ³ (Dual Circuit with 277V input)	PCS-1 = Polycarbonate Cover
Notes				REM = Remote Capable	BG-1 = Vandal Resistant Bubble Shield
¹ Universal includes 2nd exit face, backplate and canopy				SL = Special Lettering	PKMX1-* = 1ft Pendant Mount Kit
² Not available on AC units				USA = Assembled in USA	PKMX2-* = 2ft Pendant Mount Kit
³ AC only, for use with inverter or generator applications only				SV = Special Voltage (specify)	

⁴ Order as separate line item. Field installation

*Must specify finish for pendant, WH = White or BL = Black.

Ordering Example: MXBRU-SD-USA