



MX Series

CONTRACTOR GRADE THERMOPLASTIC LED EXIT



PROJECT: _____
 FIXTURE TYPE: _____
 LOCATION: _____
 CONTACT/PHONE: _____

PRODUCT DESCRIPTION

Vj g'O Z 'Ugt lgu'eqo dlpgu'cp'vntc/urko 'r qnf ectdqpcvg'j qwulpi 'cpf 'f gr gpf cdrg'O wrg" NGF 'r gthqt cpeg'q'i kxg' { qw'c'xgtucvrg'cm/lp/qpg.'43uv'egpwt { 'f guki p0Vj ku't vn' " wplxgtucrn'gzk'v'li p'lpemf gu'y g'ecpqr { 'cpf 'gz'vc'hcegu'ht'cp' { 'cr r r'ecv'kp0' kpu'cme'v'kp'ku'cee'go r r'kuj gf 'lp'o' kpwgu'y kj 'qwt'v'q'q'n'rguu.'"Upcr /k'p' 'f guki p0' Cxcl'ndrg'y kj 't'gf 'qt' i' tggp'gp'gti { 'gh'le'k'p'v'NGF 'h'ki j 'v'lu'wtegu'v'q't' t'qx'f g' { gct'u'q'h' o' cl'p'v'p'c'peg'lt'gg'"kmo' k'p'c'v'kp'c'v'c'o' l'p'ko' c'ri'eq'u0

PRODUCT SPECIFICATIONS

CONSTRUCTION

Kpl'ge'v'kp'o' q'nf'gf. 'gpi' k'p'g'gt'k'pi /i' t'cf'g. 'WX' /u'cd'rg'v'j' gto' q'r' r'u'v'k' 'E'WN; 6X/2' h'ro' g' t'c'v'pi' 'E'K0' r' c'ev' 'u'et'c'v'j. 'h'cf' g'c'p'f' "eq'tt'q'ul'q'p' /t'g'u'k'v'c'p'v'E'F' v't'c'rg'v'w'p'k'd'q'f { 'j' q'w'ul'p'i' " h'co' g'y' k'j' 'k'p'v'gi' t'c'ri'y' k't'k'pi' 'e'j' c'p'p'g'i'E'U'p'c'r' /h'v' h'c'eg'r' r'v'g'c'p'f' 'd'c'ent'r' r'v'g' 'E'U'g'e'q'p'f' " h'c'eg'r' r'v'g' 'l'p'em'f' g'f' 'h'q't' 'f' q'w'd'rg' 'h'c'eg'c'r' r' r'ec'v'k'p'u' 'E'80' 'h'g'w'g't'u'y' k'j' '5' l'60' 'u't' q'ng'y' k'f' j' 'E' E'j' g'x't'q'p' 'f' k'g'e'v'k'p'c'ri'k'p'f' k'ec'v'q't'u' 'e'c'p' 'd'g' 'g'c'ul'k' 't'go' q'x'g'f' 'q't' 't'g'k'p'ug't'v'g'f' 'c'u'p'g'e'g'u'ac't' { 'E' T'g'f' 'q't' 'i' t'ggp' 'h'g'w'g't'u' 'E'Y' j' k'g' 'q't' 'd'r'e'n'i'v'g'z' w't'g'f' 'h'k'p'k'uj' 0

ELECTRICAL

F'v'e'n'i'x'q'nc'i' g'342'499'X'CE' 'E'T'c'v'g'f' 'h'q't' 'v'ug' 'l'p' 'f' c'o' r' 'h'q'ec'v'k'p'u' 'E'U'q'rk'f' 'u'v'c'v'g' 'e'j' c't'i' k'p'i' " c'p'f' 'u'y' k'ej' k'p'i' 'E'D't'q'y' p'q'w'r' t'q'v'g'e'v'k'p' 'E'D'c'v'g't' { 'h'y' 'x'q'nc'i' g'f' k'ue'q'p'p'g'ev' 'E'Q'x'g't'q'f' " c'p'f' 'h'y' k'j' 't'v'ek'ew'k'r' t'q'v'g'e'v'k'p' 'E'CE' 'r' q'y' g't' 'l'p'f' k'ec'v'q't' 'c'p'f' 'v'g'u'v'y' k'ej' 0

LAMPS

N'q'p'i' 'h'k'g' 'g'p'g't'i' { 'u'c'x'k'p'i' 'NGF' 'h'co' r' u' 'E'T'g'f' 'q't' 'i' t'ggp' 'NGF' 'h'g'w'g't'u' 'E'U'k'i' p'u' 'e'q'p'u'w'o' g' 'h'g'u' " v'j' c'p' '6' 'y' c'w'u0

BATTERY

U'c'p'f' c't'f' 'g'z'k'v'k'i' p' 'u'w'r' r' r'k'g'f' 'y' k'j' 'P' 'k' 'e'c'f' 'd'c'w'g't' { 'TGO' 'c'p'f' 'TGO' 4' 'q'r' v'k'p' 'u'w'r' r' r'k'g'f' 'y' k'j' " r'g'c'f' 'e'c'r'e'k'w'o' 'd'c'w'g't' { 'E'U'c'p'f' c't'f' 'd'c'w'g't' { 'y' k'ri'q'r' g't'c'v'g' 'u'k'i' p' 'h'q't' 'c'o' 'l'p'k'o' w'o' "q'h'"; 2' 'o' 'k'p'w'g'u' " k'p' 'v'j' g' 'g'x'g'p'v'q'h'c' 'r' q'y' g't' 'q'w'c'i' g' 'E'TGO' 'x'g't'u'k'p' 'y' k'ri'q'r' g't'c'v'g' 'y' g' 'u'k'i' p' 'r' n'u'u' 'c'p' 'c'f' f' k'k'q'p'c'ri' 33Y' 'q'h' 't'go' q'v'g' 'h'q'c'f' 'E'TGO' 4' 'x'g't'u'k'p' 'y' k'ri'q'r' g't'c'v'g' 'u'k'i' p' 'r' n'u'u' 'c'p' 'c'f' f' k'k'q'p'c'ri' 44Y' 't'go' q'v'g' " r'q'c'f' • Temperature rating is 0-40 degrees C.

CODE COMPLIANCE

WN; 46' 'E'F' c'o' r' 'h'q'ec'v'k'p' 't'c'v'g'f' 'E'P' HRC'323' 'N'h'g' 'U'c'h'g'v'f' 'E'q'f' g' 'e'q'o' r' r'k'c'p'v' 'E'P' GE' 'c'p'f' " Q'U' 'C' 'e'q'o' r' r'k'c'p'v'0

WARRANTY

5-year warranty. Product specifications subject to change without notice.

INSTALLATION

MOUNTING

O'c' { 'd'g' 'q'r' 'd'c'ent'iq't' 'g'p'f' 'o' q'w'p'v'g'f' 'E'C'm' 'u'k'i' p'u' 'l'p'em'f' g' 's' w'len' /k'p'uc'm' /l'p'c'r' /h'v' 'e'c'p'q'r' { 'c'p'f' " o' q'w'p'v'k'p'i' 'j' c't'f' y' c't'g' 'h'q't' 'g'c'u' { 'q'r' 'q't' 'g'p'f' 'o' q'w'p'v'k'p'uc'm'v'k'p' 'E'D'c'ent'r' r'v'g' 'l'p'em'f' g'u' " w'p'l'x'g't'uc'ri'o' q'w'p'v'k'p'i' 'r' c'w'g't'p' 'h'p'q'ent'v'w'u' 'h'q't' 'u'k'o' r' r'g' 'd'c'ent'io' q'w'p'v'k'p'i' 0


ORDERING INFORMATION

model	operation	color (Letters)	faces	options	æ&• [iã• ⁵
MX	A = AC Only	R = Red	U ¹ = Universal	SD ² = Self-Diagnostics	Y I 4" = Y k'g'I' w'c't'f' "y' c'm'io' q'w'p'v'
	B = Battery Backup	G = Green		BL ³ = Black Housing	Y I 5" = Y k'g'I' w'c't'f' "e'g'k'ri'ng' 'o' q'w'p'v'
Notes				DLC ³ = Dual Circuit Input	VRS1 ¹ = Polycarbonate Vandal Shield
¹ Universal includes 2nd exit face, backplate and canopy				TGO ⁶ = Tgo q'v'g' 'E'c'r' c'd'rg' "33Y +	PKMX1 ¹ = 1ft Pendant Mount Kit
² Not available on AC units				TGO ⁴ = Tgo q'v'g' 'E'c'r' c'd'rg' "44Y +	PKMX2 ¹ = 2ft Pendant Mount Kit
³ AC only, for use with inverter or generator applications only				UN ¹ = U'r' g'el'c'ri'Ng'w'g't'k'p'i	
⁶ H'v'v'it'g'o' q'v'g' 'h'q'c'f' 'o' w'u'v'g' 'e'q'p'p'g'ev'g'f' 'y' j' g'p' 'v'ug'f' 'y' k'j' 'U'F' 'q'r' v'k'p'				WUC ¹ = C'u'g'o' d'rg'f' 'l'p' 'WUC	
⁵ Order as separate line item. Field installation				IRT ¹ = I'n'f'r'a'r'e'd' R'e'm'o't'e' T'e's't'ing	
				SV ¹ = S'p'e'c'i'a'l' V'o'l't'a'g'e' (s'p'e'c'i'f'y)	

Ordering Example: MXBRU-SD-USA



U'c'p'f' c't'f' 'X'g't'u'k'p'

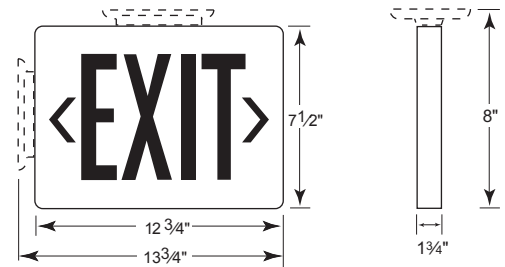

Q'r'v'k'p'c'ri' TGO 'c'p'f' 'TGO' 4' 'X'g't'u'k'p'

