MX Series

CONTRACTOR GRADE THERMOPLASTIC LED EXIT

PROJECT:
FIXTURE TYPE:
LOCATION:
CONTACT/PHONE:

PRODUCT DESCRIPTION

The MX Series combines an ultra-slim polycarbonate housing and dependable Mule LED performance to give you a versatile all-in-one, 21st century design. This truly universal exit sign includes the canopy and extra faces for any application. Installation is accomplished in minutes with our tool-less, Snap-In™ design. Available with red or green energy efficient LED light sources to provide years of maintenance-free illumination at a minimal cost.



PRODUCT SPECIFICATIONS

CONSTRUCTION

Injection molded, engineering-grade, UV-stable thermoplastic • UL94V-0 flame rating • Impact, scratch, fade and corrosion-resistant • Durable unibody housing frame with integral wiring channel • Snap-fit faceplate and backplate • Second faceplate included for double face applications • 6" letters with 3/4" stroke width • Chevron directional indicators can be easily removed or reinserted as necessary • Red or green letters • White or black textured finish.

ELECTRICAL

Dual voltage 120/277VAC • Rated for use in damp locations • Solid state charging and switching • Brownout protection • Battery low voltage disconnect • Overload and short circuit protection • AC power indicator and test switch.

LAMPS

Long life, energy saving LED lamps • Red or green LED/letters • Signs consume less than 3 watts.

BATTERY

Standard exit sign supplied with NiCad battery, REM option supplied with lead calcium battery • Standard battery will operate sign for a minimum of 90 minutes in the event of a power outage • REM version will operate the sign plus an additional 3W of remote load • Temperature rating is 0-40 degrees C.


CODE COMPLIANCE

UL924 • Damp location rated • NFPA 101 Life Safety Code compliant • NEC and OSHA compliant • California Energy Commission (CEC) • Title 20 Compliant


WARRANTY

5-year warranty. Product specifications subject to change without notice.

Standard Version

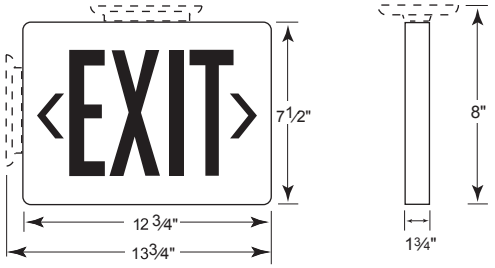

Optional REM Version

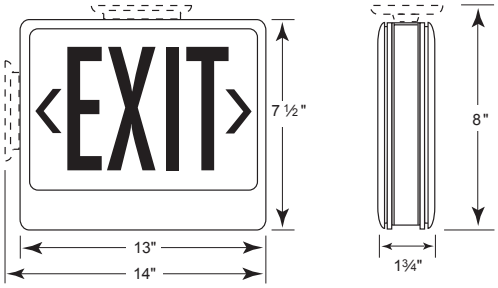

INSTALLATION

MOUNTING

May be top, back or end mounted • All signs include quick-install snap-fit canopy and mounting hardware for easy top or end mount installation • Backplate includes universal mounting pattern knockouts for simple back mounting.

ORDERING INFORMATION

Model	Operation	Color (letters)	Faces	Options	Accesories[4] (Order Separately)
MX	A = AC Only	R = Red	U[1] = Universal	SD[2] = Self-Diagnostics	WWG-1 = Wire Guard (wall mount-white)
	B = Battery Backup	G = Green		BL = Black Housing	BPG2 = Wire Guard (wall mount)
				DLC-120[3] = Dual Circuit	BPG3 = Wire Guard (ceiling mount)
				with 120V input	PCS-1 = Polycarbonate Cover
				DLC-277[3] = Dual Circuit	BG-1 = Vandal Resistant Bubble Shield
Notes				with 277V input	PNDT-UX-WH-12 = 12" Pendant Mounting Kit, White
[1] Universal includes 2nd exit face, backplate and canopy				REM = Remote Capable	PNDT-UX-WH-24 = 24" Pendant Mounting Kit, White
[2] Not available on AC units				SL = Special Lettering	PNDT-UX-WH-36 = 36" Pendant Mounting Kit, White
[3] AC only, for use with inverter or generator applications only				USA = Assembled in USA	PNDT-UX-WH-48 = 48" Pendant Mounting Kit, White
[4] Order as separate line item. Field installation				SV = Special Voltage (specify)	PNDT-UX-BL-12 = 12" Pendant Mounting Kit, Black
*Must specify finish for pendant, WH = White or BL = Black.					PNDT-UX-BL-24 = 24" Pendant Mounting Kit, Black
Ordering Example: MXBRU-SD-USA					PNDT-UX-BL-36 = 36" Pendant Mounting Kit, Black