



New York Precision Series - NYELX-A-R

Recessed Mount NY Approved AC-Only Edge-Lit Exit Sign



PROJECT: _____
 FIXTURE TYPE: _____
 LOCATION: _____
 CONTACT/PHONE: _____

PRODUCT DESCRIPTION

Mule NYELX-A-R Series Recessed Mount Edge-Lit LED Exit Signs offer long lamp life, energy efficiency and uniform illumination. They are specifically designed for recessed applications in drywall or drop ceilings. The premium architectural design of the edge-lit construction has made this the specification choice for exit signage. Mule's distinctive field-applied chevron directional indicators make the NYELX-A-R Series the most uncomplicated edge-lit sign to specify. Recessed mount construction makes it easy to enjoy the aesthetic benefits of edgelit with minimal disruption to the building's interior decor.

PRODUCT SPECIFICATIONS

CONSTRUCTION

Crystal clear acrylic face panel • Mirrored divider provided on double face signs to simulate clear aesthetics • Extruded aluminum housing • Includes telescopic hanger bars for recessed mounting • Vertically adjustable to accommodate different ceiling thickness • 8" letters with 1" stroke width • Field-applied chevron directional indicators with pre-applied installation template • Red letters • Available in white, black, and brushed aluminum trim plate finish.

ELECTRICAL

Dual voltage 120/277VAC

LAMPS

Long life, energy saving LED lamps • LEDs are connected in a series/parallel configuration such that the unlikely failure of one LED will affect no more than one other LED • Red LED letters.

CODE COMPLIANCE

UL924 • NFPA 101 Life Safety Code compliant • NEC and OSHA compliant • New York City Approved • Calendar No. 46932

WARRANTY


5-year warranty. Product specifications subject to change without notice.



ENGINEERING DATA

Primary Circuit				
TYPE	INPUT VOLTAGE	MAX. AMPS	MAX. WATTS	STANDBY WATTS
Red	120	0.148	3.2	2.8
Red	277	0.133	3.0	2.4

DIMENSIONS

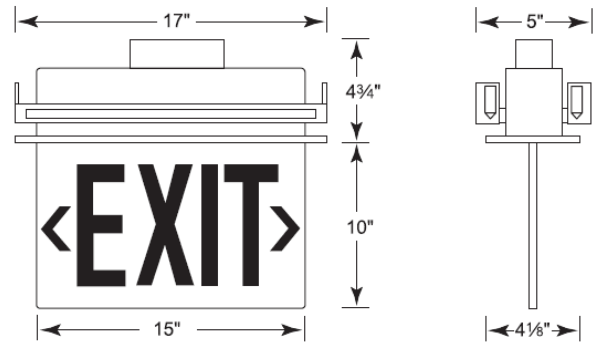

INSTALLATION

MOUNTING

Compatible with drywall or drop ceiling mount installation • Includes telescoping hanger bars • Vertically adjustable to accommodate varying ceiling thickness.

ORDERING INFORMATION

MODEL	# OF FACES	OPERATION	MOUNTING	COLOR (Trimplate)
NYELX	1 = Single 2 = Double	A = AC Only	R = Recessed Mount	BA = Brushed Aluminum BL = Black WH = White

Ordering Example: NYELX-1-A-R-BA