



# New York Precision Series - NYELX-B-R

Recessed Mount NY Approved Battery Back-up Edge-Lit Exit Sign



PROJECT: \_\_\_\_\_  
 FIXTURE TYPE: \_\_\_\_\_  
 LOCATION: \_\_\_\_\_  
 CONTACT/PHONE: \_\_\_\_\_

## PRODUCT DESCRIPTION

Mule NYELX-B-R Series Recessed Mount Edge-Lit LED Exit Signs offer long lamp life, energy efficiency and uniform illumination. They are specifically designed for recessed applications in both drywall and drop ceilings. The premium architectural design of the edge-lit construction has made this the specification choice for exit signage. Mule's distinctive field-applied chevron directional indicators make the NYELX-B-R Series the most uncomplicated edge-lit sign to specify. Recessed mount construction makes it easy to enjoy the aesthetic benefits of edgelit with minimal disruption to the building's interior decor.

## PRODUCT SPECIFICATIONS

### CONSTRUCTION

Crystal clear acrylic face panel • Mirrored divider provided on double face signs to simulate clear aesthetics • Extruded aluminum housing • Includes telescopic hanger bars for recessed mounting • Vertically adjustable to accommodate different ceiling thickness • 8" letters with 1" stroke width • Field-applied chevron directional indicators with pre-applied installation template • Red letters • Available in white, black, and brushed aluminum trim plate finish.

### ELECTRICAL

Dual voltage 120/277VAC • Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing • Internal solid-state transfer switch • Solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

### LAMPS

Long life, energy saving LED lamps • LEDs are connected in a series/parallel configuration such that the unlikely failure of one LED will affect no more than one other LED • Red LED letters.

### BATTERY

Sealed, maintenance-free nickel cadmium • Battery will operate the sign for a minimum of 90 minutes in the event of a power outage. (0°C - 50°C)

### CODE COMPLIANCE

UL924 • NFPA 101 Life Safety Code compliant • NEC and OSHA compliant • UL Listed for Damp Locations • New York City Approved • Calendar No. 46932


### WARRANTY

5-year warranty. Product specifications subject to change without notice.

## INSTALLATION

### MOUNTING


Compatible with drywall or drop ceiling mount installation • Includes telescoping hanger bars • Vertically adjustable to accommodate varying ceiling thickness.

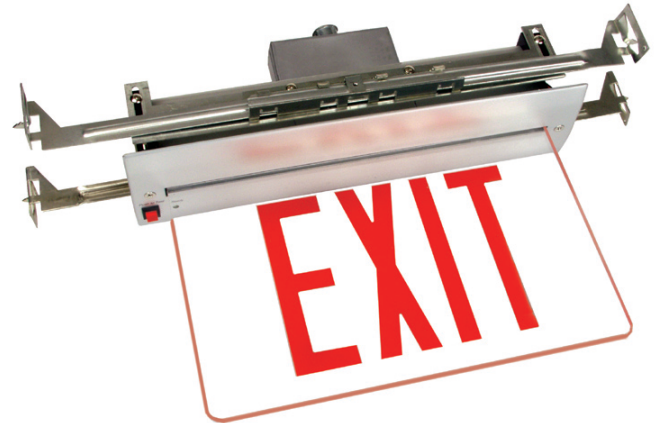

## ENGINEERING DATA

Primary Circuit				
TYPE	INPUT VOLTAGE	MAX. AMPS	MAX. WATTS	STANDBY WATTS
Red	120	0.148	3.2	2.8
Red	277	0.133	3.0	2.4

## DIMENSIONS

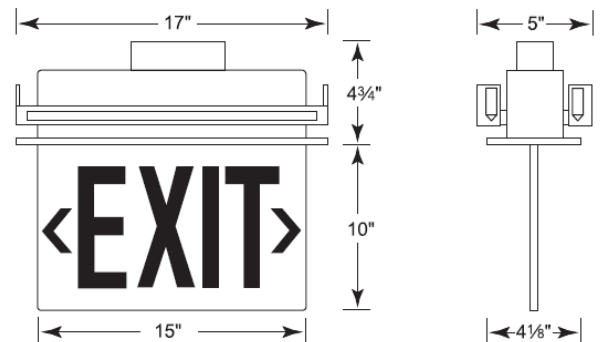

## ORDERING INFORMATION

MODEL	# OF FACES	OPERATION	MOUNTING	COLOR (Trimplate)	OPTIONS
NYELX	1 = Single 2 = Double	B = Battery Back-Up	R = Recessed Mount	BA = Brushed Aluminum BL = Black WH = White	SD = Self-Diagnostics

Ordering Example: NYELX-1-B-R-BA-SD