



# New York NYXLED Series - NYLED-EPX

## NY Approved All LED Steel Combination Unit



PROJECT: \_\_\_\_\_  
 FIXTURE TYPE: \_\_\_\_\_  
 LOCATION: \_\_\_\_\_  
 CONTACT/PHONE: \_\_\_\_\_

### PRODUCT DESCRIPTION

NYLED-EPX New York Approved Steel All LED Combination Exit Sign/ Emergency Light offers long lamp life, energy efficiency and uniform illumination in a sleek yet rugged design. Possessing premium installation features such as knockout chevron directional indicators, the NYLED-EPX Series offers unsurpassed value in an aesthetically pleasing design. The NYLED-EPX Series is provided with two or three LED lighting heads, combining LED exit signage with LED emergency lighting function for a convenient, comprehensive solution.

### PRODUCT SPECIFICATIONS

#### CONSTRUCTION

Rugged, heavy duty 20-gauge die formed steel construction • LED light heads made from high impact resistant thermoplastic • Universal mounting pattern knockouts in backplate for back mounting • 8” letters with 1” stroke width • Chevron directional indicators knockouts • Red letters • Durable powder coated white finish is standard.

#### ELECTRICAL

Dual voltage 120/277VAC • Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing • Internal solid-state transfer switch • Solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

#### BATTERY

Sealed, maintenance-free Ni-Cad • Standard battery will operate sign and three LED heads for a minimum of 90 minutes in the event of a power outage. (0°C – 50°C)

#### LAMPS

Long life, energy saving LED lamps • LEDs are connected in a series/parallel configuration such that the unlikely failure of one LED will affect no more than one other LED • Red LED letters.

#### HEADS


Includes two or three 3.6V, 1W LED lighting heads • SMD 2835 LED, CCT 6000K, L70 35,000 hours • Heads are fully adjustable in all directions for comprehensive lighting coverage.

#### CODE COMPLIANCE

UL924 • NFPA 101 Life Safety Code compliant • NEC and OSHA compliant • UL Listed for Damp Locations • New York City Approved •

#### WARRANTY

5-year warranty. Product specifications subject to change without notice.

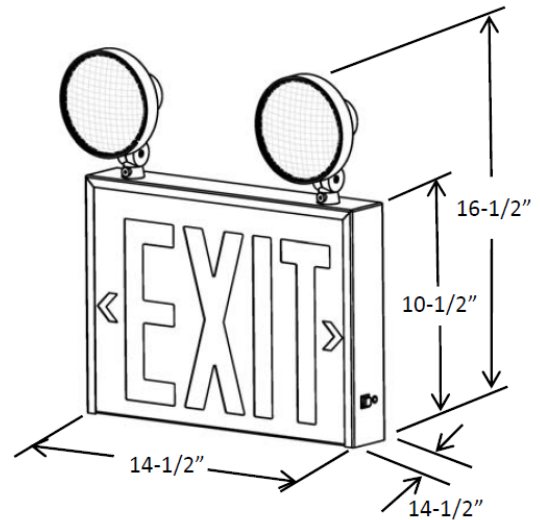

### INSTALLATION

#### MOUNTING

May be back mounted or side mounted • Backplate includes universal mounting pattern knockouts for simple back mounting.



### ORDERING INFORMATION

model	# of faces	# of heads	housing color	options
NYLED-EPX	U = Single/Double	2 = 2 Heads 3 = 3 Heads	WW = White	NH = No heads

Ordering Example: NYLED-EPX-U-2-WW