

BENEFITS & FEATURES


- Architectural-grade, die cast aluminum housing and faceplate
- Includes die cast aluminum canopy for top or end mounting
- Universal mounting pattern knockouts for J-box mounting
- Pre-drilled canopy attachment locations with easily removed hole covers
- Integral wiring channels
- Gently curved faceplate snaps into housing without tools
- Second faceplate included to field-convert from single to double face with universal configuration
- 8" letters with 1" stroke width
- Full-size, 3/4" wide chevron directional indicators are field selectable
- Optional Self-Test and Self-Diagnostics (battery backup version only)
- Dual voltage 120/277VAC
- Maintenance-free 4.8V sealed, nickel cadmium battery (battery backup version)

CODE COMPLIANCE

- UL Listed
- NFPA 101 Life Safety Code compliant
- NEC and OSHA compliant
- New York City Approved

DIE CAST ALUMINUM LED EXIT

The New York Approved NY Meridian Series is ideal for applications that require the durability of metal construction in an economical package. All NY Meridian Series signs include a second faceplate for universal single/double face applications and canopy for universal top, end or back mounting.

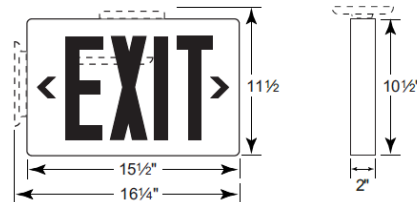

ACCESSORIES

| Catalog Number | Description |
|----------------|-------------------------------------|
| BG-1 | Polycarbonate Vandal Shield - Large |
| WG-2 | Wire Guard - Small |

Accessories are ordered separately. To order, specify catalog number. Refer to Options & Accessories specification sheet for additional information.

ORDERING INFORMATION

| MODEL | OPERATION | # OF FACES | LETTER COLOR | HOUSING COLOR | OPTIONS | | |
|-------|---------------------|---------------|--------------|--------------------------------|-----------------------|----------------|-------------------|
| NYMD | A = AC-Only | 1 = Single | R = Red | BA = Black w/ Brushed Aluminum | SD = Self-Diagnostics | | |
| | B = Battery Back-Up | 2 = Double | | | | BB = All Black | TP = Tamper-Proof |
| | | U = Universal | | | | WH = All White | |

Ordering Example: NYMD-B-2-R-BA-SD