



SSL-HO Series

ALL LED THERMOPLASTIC EMERGENCY LIGHT



PROJECT: _____
FIXTURE TYPE: _____
LOCATION: _____
CONTACT/PHONE: _____

PRODUCT DESCRIPTION

The SSL-HO Series is a compact architectural emergency lighting unit designed for fast wall or ceiling mount installation and reliable service. Integral LED based lamp-heads are fully adjustable. Unit provides a full 90 minutes of emergency lighting.

PRODUCT SPECIFICATIONS

CONSTRUCTION

Injection molded, engineering-grade, UV-stable thermoplastic • UL94V-0 flame rating • Impact, scratch, fade and corrosion-resistant • Snap-fit housing and mounting plate • White or black textured finish.

ELECTRICAL

Dual 120/277 voltage standard • Rated for use in damp locations • Solid state charging and switching • Brownout protection • Battery low voltage disconnect • Overload and short circuit protection • AC power indicator and test switch.

LAMPS

Long life, energy saving LED lamps • 1.5 Watt LED lamps providing 300 total lumens

HEADS

Includes two 1.5W white LED lighting heads • Contemporary semi-recessed round head design • High performance reflector and plastic lens for optimal light distribution • Adjustable LED lamp heads provide optimal center-to-center spacing.

BATTERY


Maintenance-free sealed NiCad battery • Standard battery will operate fixture for a minimum of 90 minutes in the event of a power outage • High Output (REM Option) version will operate the fixture plus 2 remote heads for a minimum of 90 minutes.

CODE COMPLIANCE

UL924 • UL Listed for damp locations (0°C – 50°C) • NFPA 101 Life Safety Code compliant • NEC and OSHA compliant

WARRANTY

3 year warranty. Product specifications subject to change without notice.

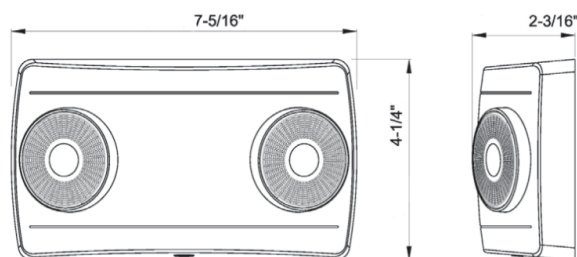

INSTALLATION

MOUNTING

Suitable for wall or ceiling mounting • Surface mount via easy connect back plate, which fits most standard junction boxes • Top knockout for conduit applications.



ORDERING INFORMATION

model	housing color	options	accessories ²
SSL-HO	W = White	SD = Self Diagnostics	WG1 = Wire Guard (Silver)
	B = Black	REM ¹ = Remote Capable	WG-STI-9703 = Wire Guard (White Powdercoat)
			RM-1 = Indoor Single Remote Head
			RM-2 = Indoor Double Remote Head
			R-ASRLED-1-WP = Outdoor Single Remote Head
Notes			R-ASRLED-2-WP = Outdoor Double Remote Head

¹Additional capacity to run up to 2 watts of remote lighting heads

²Order separately

Ordering Example SSL-HO-W-REM



SSL-HO Series


ALL LED THERMOPLASTIC EMERGENCY LIGHT




PROJECT: _____
FIXTURE TYPE: _____
LOCATION: _____
CONTACT/PHONE: _____

PHOTOMETRICS

3ft Path Spacing

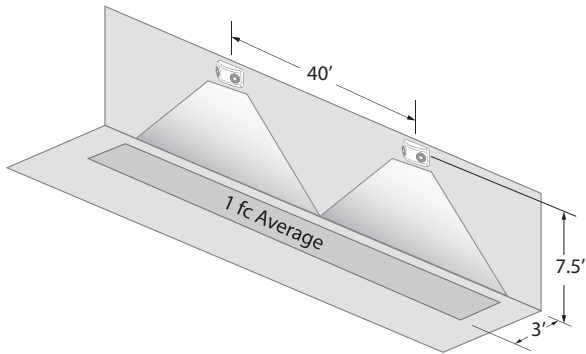

6ft Path Spacing

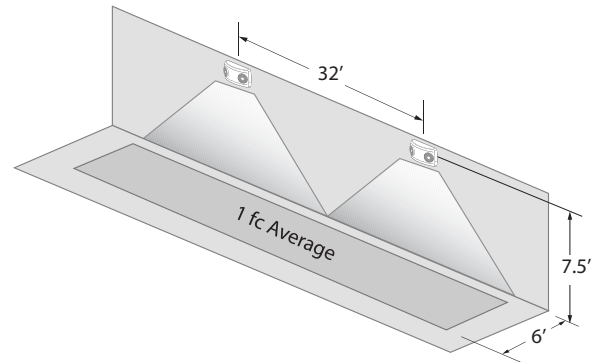

INDOOR REMOTE HEADS



OUTDOOR REMOTE HEADS

