

# INSTALLATION INSTRUCTIONS

## IMPORTANT SAFEGUARDS READ AND FOLLOW ALL SAFETY INSTRUCTIONS

1. Review the diagrams thoroughly before beginning.
2. All electrical connections must be in accordance with local codes, ordinances, and the National Electric code.
3. Disconnect power at fuse or circuit breaker before installing or servicing.
4. Unit suitable for outdoor use.
5. Do not mount in hazardous locations, or near gas or electric heaters.
6. Do not let power cords touch hot surface.
7. Equipment should be mounted in locations and at heights where it will not be subjected to tampering by unauthorized personnel.
8. The use of accessory equipment not recommended by the manufacturer may cause an unsafe condition.
9. Do not use this equipment for other than intended use.
10. All servicing should be performed by a qualified personnel only.

## SAVE THESE INSTRUCTIONS


### Wall Mounting (see Fig 2)

1. Open front cover by screwdriver (see Fig 1).
2. Knock out center and appropriate mounting screw holes on the back plate, paste gasket on back of back plate
3. Feed building power supply wires through the center hole, fix back plate to waterproof type junction box by screws.
4. Make correct electrical connections inside of fixture according wiring diagram.
5. Push excess wire into junction box.
6. Snap chevron to EXIT panel if required, restore front panel on unit.

### Side /Ceiling Mounting(see Fig 3/4)

1. Attach crossbar to junction box, set the crossbar so that the longer blade is touching the waterproof type junction box.
2. Open front cover by screwdriver.
3. If double face is desired, replace back plate with additional face plate provided.
4. Knock out the mounting hole on the top or side of the unit, assemble the canopy on the unit (see Fig 5).
5. Route the proper wires through mounting hole out of housing .
6. Make electrical connections inside the J-Box as wiring diagram.
7. Fasten crossbar on J-box by screws provided.
8. Paste gasket on canopy, then fasten canopy to crossbar and against to the wall.
9. Snap chevron to EXIT panel if required.

Wiring diagram

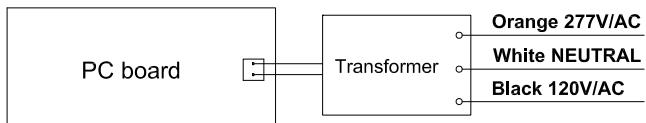

Connect the white wire to neutral.

If using 120V, connect the black wire to the hot lead.

If using 277V, connect the orange wire to the hot lead.

Cap the unused lead.

Open front cover


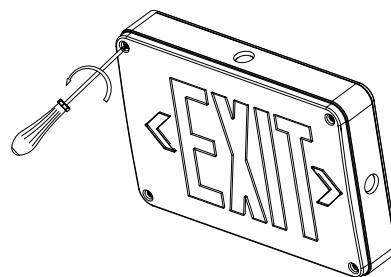



Fig 1

### Wall mount

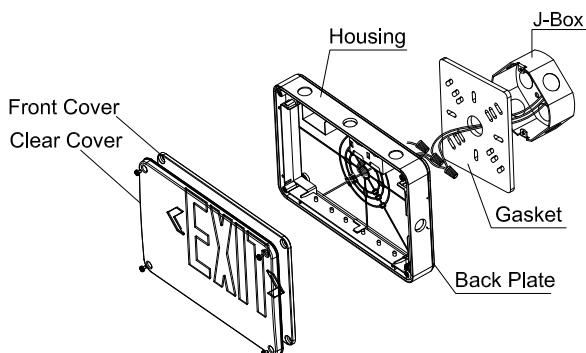

**Fig 2**


### Canopy assembly

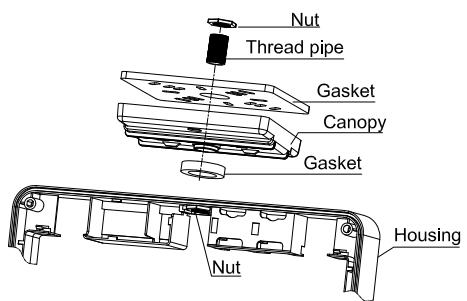

**Fig 5**


Use provided thread pipe and 2 nut fix canopy on unit, put gasket between unit and canopy.

### Side mount

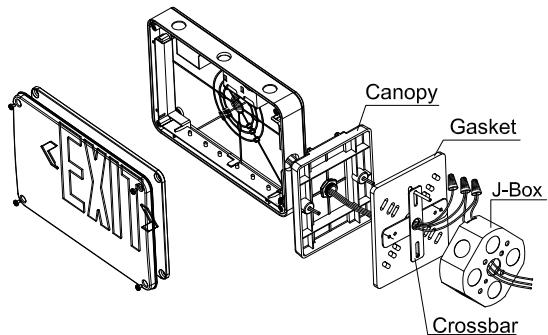

**Fig 3**

### Ceiling mount

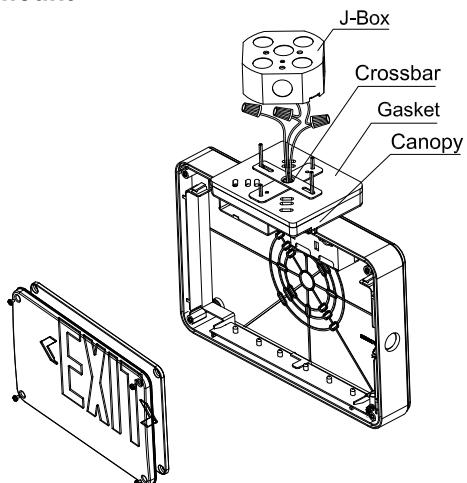

**Fig 4**