



LEDSDXR627 - LED STEEL EMERGENCY UNIT



PROJECT:


FIXTURE TYPE:

LOCATION:

CONTACT/PHONE:



DIMENSIONS

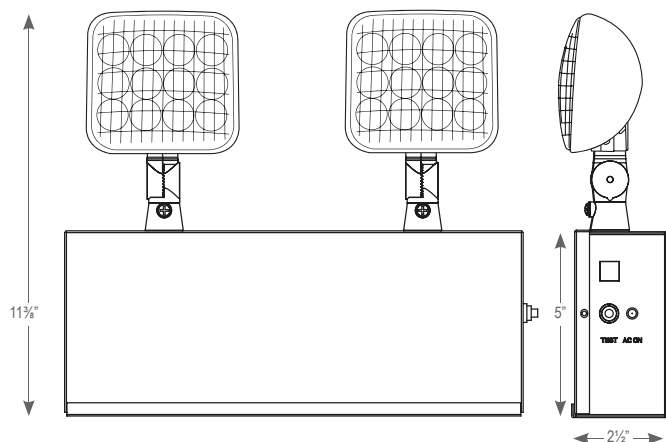

ILLUMINATION

- Long lasting, efficient, ultra bright white LED lamp heads.
- 1.5 watt (12 LEDs x 0.125 watt) per head.
- High performance chrome-plated metallized reflector and plastic lens for optimal light distribution.
- Adjustable LED lamp heads provide optimal center-to-center spacing.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- 6V sealed lead acid, maintenance-free, rechargeable battery.
- Internal solid-state transfer switch automatically connects the internal battery to the LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery-charging to recharge a discharged battery in 24 hours. Remote capacity of 20.0 watt standard. Runs up to 8 hours without remote heads.

HOUSING

- Durable 20-gauge steel construction in white or black finish.
- Injection-molded engineering grade high-impact thermoplastic lamp heads to match housing finish.

MOUNTING

- Universal knockout pattern on back plate for wall mount.
- Side and top knockouts for conduit feed applications.

WARRANTY

- Five year warranty on all electronics and housing. Battery prorated for two years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (20°C-50°C) standard.

ORDERING INFORMATION

MODEL	VOLTAGE	WATTS	HOUSING COLOR
LEDSDXR627	6 = 6 Volt	27 = 27 Watts	(Blank) = White
			B = Black

Ordering Example: LEDSDXR627




LEDSDXR627 - LED STEEL EMERGENCY UNIT



PROJECT: _____
FIXTURE TYPE: _____
LOCATION: _____
CONTACT/PHONE: _____

SPACING DIAGRAMS

3ft Path Spacing

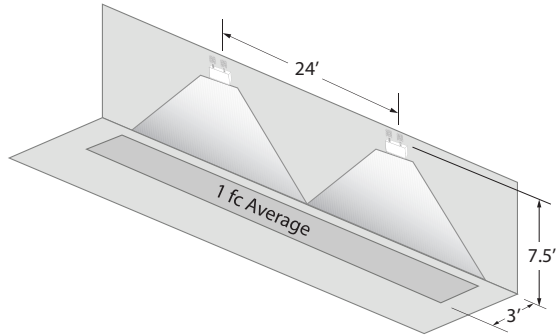

6ft Path Spacing

