



RMX - Compact Thermoplastic Exit Sign



PROJECT:


FIXTURE TYPE:

LOCATION:

CONTACT/PHONE:



DIMENSIONS

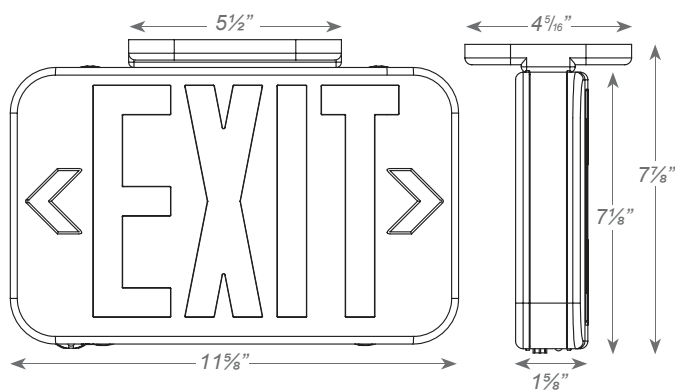

ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LEDs.

MOUNTING

- EZ-snap mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 1.2V Long life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- Aesthetically pleasing, curved face, rounded corner design.
- EZ snap-out Chevron directional indicators.

WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).
- Certified to CEC under Title 20 Regulations.



ORDERING INFORMATION

Model	No. of Faces	Letter Color	Housing Color	Battery	Options	Accessories
RMX	U = Universal Single/	R = Red	W = White	(blank) = AC-Only	SD = Self-Diagnostics	WG1 = Wire Guard (wall mount, brushed silver)
	Double Face	G = Green	B = Black	EM = Battery Backup	REM = Remote Capable	BPG2 = Wire Guard (wall mount, powdercoat white)
						BPG3 = Wire Guard (ceiling mount, powdercoat white)
						PCS-1 = Polycarbonate Cover*
						BG-1 = Vandal Resistant Bubble Shield

NOTE: SALIDA face plate option available. Check with your Mule Lighting Representative.

*Not for units with REM

EXAMPLE: RMX-U-R-W-EM