



# PRLEDCNYXTE- NEW YORK CITY APPROVED LED EXIT & EMERGENCY COMBO



PROJECT: \_\_\_\_\_  
 FIXTURE TYPE: \_\_\_\_\_  
 LOCATION: \_\_\_\_\_  
 CONTACT/PHONE: \_\_\_\_\_



## ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power “ON” LED indicator light and push-to-test switch for mandated code compliance testing.
- 9.6V maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Remote capable standard.

## MOUNTING

- Knockouts on the back for wall mount.
- Mounting hardware provided for ceiling (2-head model) or end mount.
- Knockouts provided for conduit feed applications.

## HOUSING

- Durable, powder-coated 20-gauge steel construction in white or black finish.
- Injection-molded, engineering grade, high-impact, thermoplastic heads.
- Field removable steel knockout chevron directional indicators on exit face.


## WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery pro rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).

## ELECTRICAL INFORMATION

| MODEL NUMBER | INPUT WATTS (W) |      | INPUT AMPS (A) |      | BATTERY | REMOTE CAPACITY |
|--------------|-----------------|------|----------------|------|---------|-----------------|
|              | 120V            | 277V | 120V           | 277V |         |                 |
| PRLEDCNYXTE  | 5.2             | 6.2  | 0.06           | 0.04 | 9.6V    | 1.5W-3W         |

## DIMENSIONS

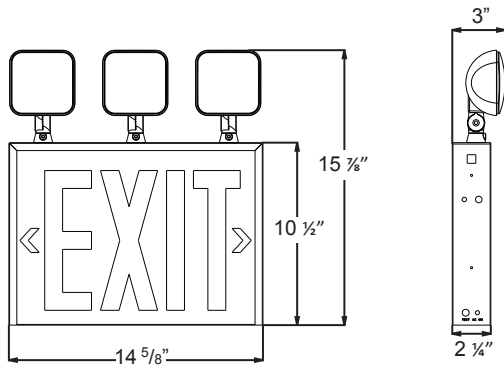

## STANDARD

- NYC Approved
- UL Listed

## ILLUMINATION

- Field installable 3rd emergency lighting head included with the PRLEDCNYXTE-43 model.
- Knockouts provided on sides of unit to relocate lamp heads.
- High performance chrome-plated metallized reflector and plastic lens for optimal light distribution.
- Ultra bright, energy efficient, long life Red LEDs.
- New York City compliant 8” EXIT letters.
- Adjustable 1.5W square LED lamp heads with long lasting & efficient ultra bright white LEDs.

## ORDERING INFORMATION

| Model       | No. of Faces       | Letter Color | Housing Color | Total No. of Heads<br>(Integral + Remote) | No. of Integral Heads |
|-------------|--------------------|--------------|---------------|---|-----------------------|
| PRLEDCNYXTE | 3 = Universal      | R = Red      | W = White     | 4 = 4 Heads                               | 2 = 2 Heads           |
|             | Single/Double Face |              |               |   | 3 = 3 Heads           |

NOTE: Using 1.5W LED remote heads.

EXAMPLE: PRLEDCNYXTE1RW-42