



HLCWLEZU


All LED Hazardous Exit & Emergency Combo



PROJECT: _____
 FIXTURE TYPE: _____
 LOCATION: _____
 CONTACT/PHONE: _____



DIMENSIONS

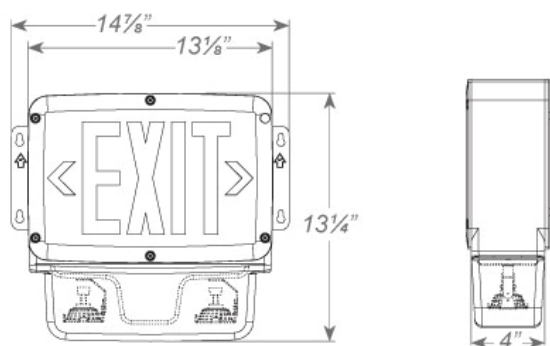

ILLUMINATION

- Two fully adjustable, ultra bright 3.3 watt high performance MR-16 base LED lamp heads for optimized center-to-center spacing.
- Long-life, energy efficient Red or Green LED EXIT sign illumination.

MOUNTING

- Die-cast mounting brackets provided for surface wall-mount installation.
- Pre-installed conduit hub for conduit and pendant-mount installation.

ORDERING INFORMATION

Model	Number of Faces	Letter Color	Voltage	Wattage	Housing Color	Options
HLCWLEZU	1 = Single ¹	R = Red	6 = 6 volts	12 = 12 watts	G = Gray	SDT = Self-Diagnostics
	2 = Double ²	G = Green	12 = 12 volts	15 = 15 watts		CW = Cold Weather TP = Tamper-Proof NH = No Heads

¹ Available only in 15W models. ² Available only in 12W models.

Ordering Example: HLCWLEZU-1-R-6-15-G

HOUSING

- Housing is fiberglass reinforced polycarbonate construction in gray finish.
- Corrosion-resistant enclosure with one piece, high-impact resistant, UV stabilized polycarbonate lens and molded gasket with stainless steel screws.
- EZ snap-out Chevron directional indicators.

ELECTRICAL

- Dual 120/277 voltage.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check-battery).
- Charge rate/power "ON" LED indicator light and magnetic test switch for mandated code compliance testing.
- 6V/12V maintenance-free, rechargeable NiCd battery (12W, 15W models).
- Offers 4.8W and 7.8W of remote capacity (6V/12V DC output) standard on the 12W and 15W models.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.
- CW: Optional internal heater and battery blanket for extreme cold temperature applications (-20°C – 50°C).
- TP: Tamper-proof hardware helps discourage unauthorized access to the unit.
- NH: No lamp heads attached to the unit enabling it to be used as a remote capable EXIT sign.

WARRANTY/LISTINGS

- Five year warranty on all electronics and housing. Batteries prorated for five years.
- Meets UL924, UL844, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.
- IP66 rated for Ingress protection.
- Rated for Class 1, Division 2, Groups A,B,C, & D.
- UL listed for wet locations (0°C – 50°C).





HLCWLEZU

All LED Hazardous Exit & Emergency Combo



PROJECT: _____
FIXTURE TYPE: _____
LOCATION: _____
CONTACT/PHONE: _____

REMOTE LAMP COMPATIBILITY

Reference remote lamp head specification sheets for complete catalog number ordering information.

MODEL NUMBER	BATTERY	REMOTE CAPACITY	HLRHLED16	ASR-LED*	R-ASRLED*
HLCLWEZU	6V, 12V	4.8W, 7.8W	X	X	X

*Not Class1 Division 2 rated. For use in non-hazardous locations only.

ELECTRICAL INFORMATION

HLCWLEZU Series Model with Input Voltage Rating	Vac	Hz	Max. Current (A)	Max. Power (W)
6V battery version	120	60	0.20	16
	277	60	0.07	19
12V battery version	120	60	0.14	16
	277	60	0.07	18