



HLRHLED16



LED Hazardous Location Remote Head



PROJECT: _____
 FIXTURE TYPE: _____
 LOCATION: _____
 CONTACT/PHONE: _____



DIMENSIONS

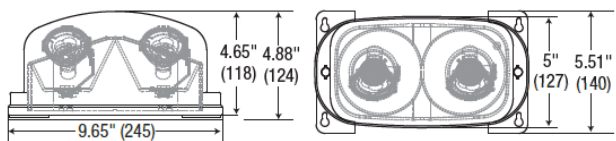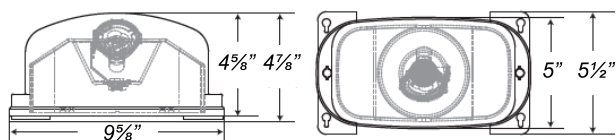

FIXTURE COMPATIBILITY CHART

Reference individual unit equipment specification sheets for remote load capacity availability.

MXBRU-REM*	SQC-REM*	SQ-80-LED-REM*
CEU-RC	MDC-REM	MRX
E-1-RC	R-16HO*	LEDSDXR627
WLEM-RC	KES	HLEMR16
AL-REM*	CWLEZXTE-RC	WLEM-REM
		HLCWLEZXTE

* SDT versions of the fixtures are not compatible with the INDRHLED16 remote heads

ILLUMINATION

- Two fully adjustable, ultra bright 3.3 watt high performance MR-16 base LED lamp heads for optimized center-to-center spacing.

MOUNTING

- Die-cast mounting brackets provided for surface wall-mount installation.
- Distance of maximum run is determined by system voltage, wire gauge and total maximum wattage on the run.

HOUSING

- Housing is fiberglass reinforced construction in gray finish.
- Corrosion-resistant enclosure with one piece, high-impact resistant, UV stabilized polycarbonate lens and molded gasket with stainless steel screws.

ELECTRICAL

- Powered from low voltage 6V/12V DC power source with low voltage wiring (not provided).

OPTIONS

- TP: Tamper-proof hardware helps discourage unauthorized access to the unit.

WARRANTY/LISTINGS

- Five year warranty.
- UL listed with approved Mule Lighting Products.
- IP66 rated for Ingress protection.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Rated for Class 1, Division 2, Groups A, B, C, and D.



ORDERING INFORMATION

Model	Heads	Housing Color	Options
HLRHLED16	1 = Single 2 = Twin	G = Gray	TP = Tamper-Proof

Ordering Example: HLRHLED16-1-G