




HLWLEZU Hazardous Location Exit Sign



PROJECT: _____
FIXTURE TYPE: _____
LOCATION: _____
CONTACT/PHONE: _____



DIMENSIONS

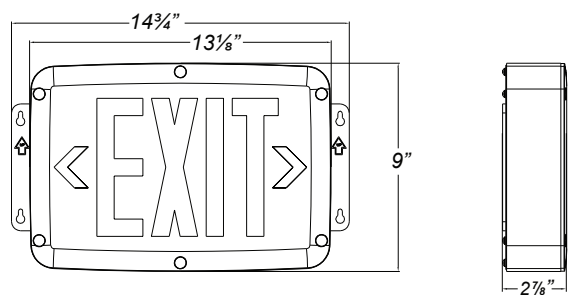

ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LEDs.

HOUSING

- Housing is reinforced polycarbonate construction in gray finish.
- Corrosion-resistant enclosure with one piece, high-impact resistant, UV stabilized polycarbonate lens and molded gasket with stainless steel screws.
- EZ snap-out Chevron directional indicators.

MOUNTING

- Die-cast mounting brackets provided for surface wall-mount installation.
- Pre-installed conduit hub for conduit and pendant-mount installations.

ELECTRICAL

- Dual 120/277 voltage.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check-battery).
- Charge rate/power "ON" LED indicator light and magnetic test switch for mandated code compliance testing.
- 4.8V long-life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.
- TP: Tamper-proof hardware helps discourage unauthorized access to the unit.

ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120	277	120V	277V
HLWLEZU-RED/GREEN/EM/SDT	3.0	3.0	0.03	0.02

WARRANTY & LISTING

- Five year warranty on all electronics and housing. Batteries pro-rated for five years.
- Meets UL924, UL844, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.
- IP66 rated for Ingress Protection.
- Rated for Class 1, Division 2, Groups A, B, C & D.
- Certified to CEC under Title 20 Regulations.
- UL listed for wet locations (-20°C – 50°C).

ORDERING INFORMATION

Model	No. of Faces	Letter Color	Housing Color	Battery	Options
HLWLEZU	1 = Single 2 = Double	R = Red G = Green	G = Gray	(blank) = AC-Only EM = NiCd Battery	SDT = Self-Diagnostics ¹ TP = Tamper-Proof

Example: HLWLEZU1RGEM ¹ Available in EM units only.

