



## WLMX-REM SERIES

REMOTE CAPABLE WET LOCATION LOW PROFILE LED EXIT



PROJECT: \_\_\_\_\_  
FIXTURE TYPE: \_\_\_\_\_  
LOCATION: \_\_\_\_\_  
CONTACT/PHONE: \_\_\_\_\_

### PRODUCT DESCRIPTION

WLMX-REM Series Wet Location Remote Capable LED Exit Signs offer long lamp life, energy efficiency and uniform illumination. The water-tight, corrosion-resistant thermoplastic housing is sealed and gasketed to protect the internal electronics from water, dust and corrosive liquids. The WLMX-REM Series is designed with knock-out chevron directional indicators for ultimate installation flexibility and simplified specification. The vibration resistant LED illumination and polycarbonate lens makes this fixture ideal for demanding industrial environments, especially those subject to frequent water spray.

### PRODUCT SPECIFICATIONS

#### CONSTRUCTION

Corrosion-resistant, impact-resistant, injection-molded UL94 V-0 flame retardant, high-temperature polycarbonate housing • Clear polycarbonate lens • Sealed and gasketed • Sealed test switch and power indicator • Multiple factory identified conduit entry locations • 6" letters with 3/4" stroke width • Chevron directional indicators can be easily removed as necessary • Single face, double face or universal • Red or green letters • Industrial gray finish standard.

#### ELECTRICAL

Dual voltage 120/277VAC • Rated for use in wet locations • Solid state charging and switching • Brownout protection • Battery low voltage disconnect • Overload and short circuit protection • Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery) • AC power indicator and test switch.

#### LAMPS

Long life, energy saving LED lamps • Red or green LED/letters • Signs consume less than 4 watts.

#### BATTERY

Long life, 3.6V maintenance-free, high performance nickel cadmium • Designed to operate over a wider range of temperature conditions (-4°F to 120°F recommended operating range) • Battery will operate sign for a minimum of 90 minutes in the event of a power outage and up to 3 watts of remotes.

#### CODE COMPLIANCE

UL924 • Wet Location Listed • Suitable for use in (-4°F to 120°F) temperature range • NFPA 101 Life Safety Code compliant • NEC and OSHA compliant • CEC Title 20 Compliant


#### WARRANTY

5-year warranty. Product specifications subject to change without notice.

### INSTALLATION

#### MOUNTING

Surface (surface top, back, or end) mount only • Top and side knock-outs for conduit feed applications • Includes mounting screws, hardware, and gaskets.

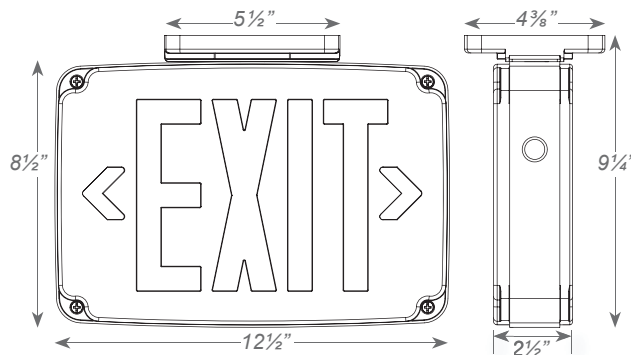

### ORDERING INFORMATION

Model	Description
WLMX-REM-R	Wet Location, Remote Capable Exit, Red Letters, Single/Double Face, Universal
WLMX-REM-G	Wet Location, Remote Capable Exit, Green Letters, Single/Double Face, Universal

Ordering Example: WLMX-REM-R