




EZRX-USA Compact Thermoplastic Exit Sign



PROJECT: _____
 FIXTURE TYPE: _____
 LOCATION: _____
 CONTACT/PHONE: _____



DIMENSIONS

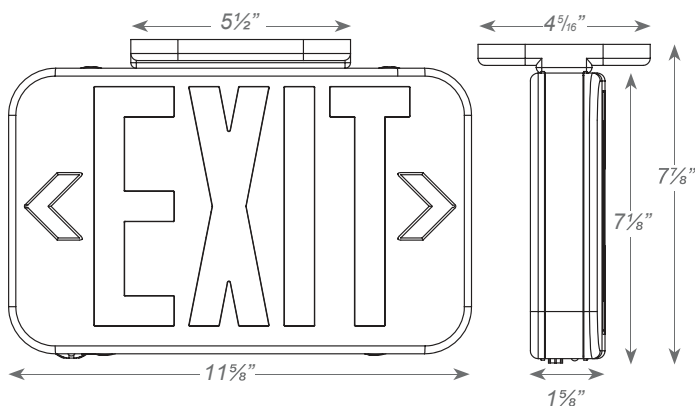

ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LED.

MOUNTING

- EZ-snap mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 1.2V Long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- Aesthetically pleasing, curved face, rounded corner design.
- EZ snap-out chevron directional indicators.

OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes. Universal 120-277 voltage.

WARRANTY

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).
- Certified to CEC under Title 20 Regulations.
- USA: Substantial transformation assembly in the U.S. complies with "Assembled in USA" under the Buy American Act.



ORDERING INFORMATION

Model	No. of Faces	Letter Color	Housing Color	Battery	Options
EZRX-USA	2 = Universal Single/ Double Face	R = Red G = Green RG = Red/Green ¹	W = White B = Black	(blank) = AC Only EM = Battery	SDT = Self-Diagnostics ^{2 3}

Notes: ¹ Field selectable

² Available only with EM units

³ Not available with RG units

Ordering Example: EZRX-USA-2-R-W



EZRX-USA

Compact Thermoplastic Exit Sign



PROJECT: _____

FIXTURE TYPE: _____

LOCATION: _____

CONTACT/PHONE: _____

ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
EZRX-USA-RED/GREEN EM	1.0	1.0	0.1	0.1
EZRX-USA-RED SDT	2.5	2.5	0.05	0.05
EZRX-USA-GREEN SDT	2.7	2.7	0.05	0.05