



# EHE-AC

## LED High Bay Emergency Light with Night Lighting Option



PROJECT: \_\_\_\_\_  
 FIXTURE TYPE: \_\_\_\_\_  
 LOCATION: \_\_\_\_\_  
 CONTACT/PHONE: \_\_\_\_\_



### PRODUCT DESCRIPTION

A powerful LED fixture designed for very low profile recessed ceiling mount, or optional surface mount, suitable for interior locations, at heights over 40 ft from floor level.

### CONSTRUCTION

- LEDs and electronics encased in a UV stabilized, abrasion-resistant polycarbonate lens with an IP67 rated watertight and dust-proof seal.
- Recessed Mount: faceplate from extruded machined aluminum, available with brushed finish or a variety of satin enamel paint colors.
- Surface Enclosed Mount: steel housing with bracket mount locations and multiple knockouts for wiring connection.
- Optional composite outdoor rated gasket seal for wet location operations.
- 12" Standard pendant option available. Contact factory for other lengths. Kit includes canopy and wire harness.

### APPLICATIONS

- **Standard Model:** Maximum Floor Coverage from Ceiling Heights up to 40 Feet and More
- **Wide Angle Lens Option:** Maximum Floor Coverage from a Standard Ceiling Height

### ENERGY EFFICIENT OPERATION

- Dual function operation for optional normally on night or security lighting as well as emergency lighting.
- Over 50,000 hour lamp life in normal use.
- IES photometric data available for all models.
- Lamp efficacy: 159 lumens/ watt.

### ELECTRONICS

- Lamps are connected in parallel. If one string of lamp fails, one or more strings will continue in operation.
- Power supply delivers regulated current and voltage to LED lamps at optimum levels to maximize lamp life.
- LED color temperature 4,700K and CRI of 70. 70% lumen maintenance (L70) at 50,000 hrs.

### POWER/LUMEN RANGE

Emergency Power Watts	Wide Angle Lumens	Standard Model Lumens
20	3319	3189
30	4978	4784
40	6637	6378

### CODES

LED Lamp Assembly ROHS compliant, LM-79 tested, and rated IP67.

### WARRANTY

- 10 year total customer satisfaction warranty.



### ORDERING INFORMATION

Model	Operation	Emergency/Security Power Rating	Mount	Finish	Options
EHE	AC= 120/ 277 VAC Input	20= 20 Watts	S= Surface	A= Aluminum	DAC= Dual AC input for Security Lighting (AC Models Only)
		30= 30 Watts	R= Recessed	K= Black	EM48= 48VDC Emergency Input
		40= 40 Watts		W= Satin White	EB= End Bracket
				X= Custom	NAT= Natatorium Rated
					PEN= Pendant Mount*
					*Standard 12". Contact factory for other sizes.
					ST= Stainless Mount Bracket (Surface Open Mount)
					SV= Pendant Swivel Mount
					WA= Wide Angle

Ordering Example: EHE-AC-30-S-W-WA



# EHE-AC

## LED High Bay Emergency Light with Night Lighting Option



PROJECT: \_\_\_\_\_  
FIXTURE TYPE: \_\_\_\_\_  
LOCATION: \_\_\_\_\_  
CONTACT/PHONE: \_\_\_\_\_


### SUGGESTED SPECIFICATIONS

Install EHE High Output LED emergency lighting fixture manufactured by Mule Lighting, Inc., available as a device powered from building AC power. The unit may be specified to operate continuously for security or night lighting, as required.


### MOUNTING DATA & DIMENSIONS

#### INTERIOR & DAMP LOCATIONS

##### Recess Mount

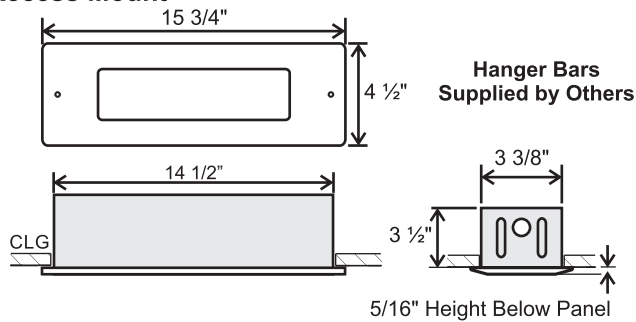


##### Surface Enclosed Mount Standard

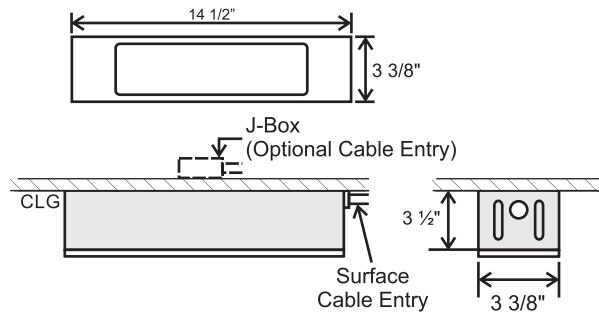


#### EXTERIOR & WET LOCATIONS

##### Recess Mount

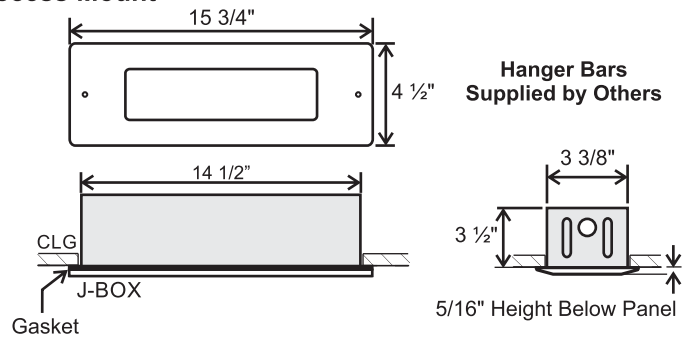

##### Surface Open Mount

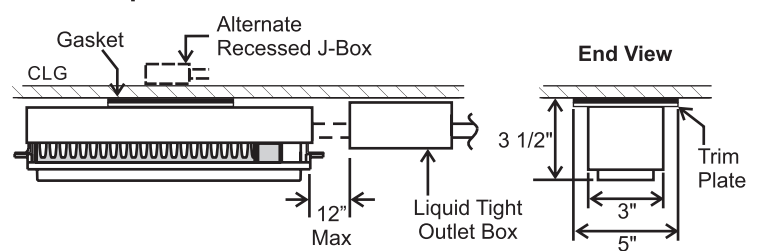

##### Pendant Mount

