



## EHE-AC

### LED High Bay Emergency Light with Night Lighting Option



PROJECT: \_\_\_\_\_  
FIXTURE TYPE: \_\_\_\_\_  
LOCATION: \_\_\_\_\_  
CONTACT/PHONE: \_\_\_\_\_



### PRODUCT DESCRIPTION

A powerful LED fixture designed for very low profile recessed ceiling mount, or optional surface mount, suitable for interior locations, at heights over 40 ft from floor level.

### CONSTRUCTION

- LEDs and electronics encased in a UV stabilized, abrasion-resistant polycarbonate lens with an IP67 rated watertight and dust-proof seal.
- Recessed Mount: faceplate from extruded machined aluminum, available with brushed finish or a variety of satin enamel paint colors.
- Surface Enclosed Mount: steel housing with bracket mount locations and multiple knockouts for wiring connection.
- Optional composite outdoor rated gasket seal for wet location operations.
- 12" Standard pendant option available. Contact factory for other lengths. Kit includes canopy and wire harness.

### APPLICATIONS

- **Standard Model:**  
Maximum Floor Coverage from Ceiling Heights up to 40 Feet and More
- **Wide Angle Lens Option:**  
Maximum Floor Coverage from a Standard Ceiling Height

### ENERGY EFFICIENT OPERATION

- Dual function operation for optional normally on night or security lighting as well as emergency lighting.
- Over 50,000 hour lamp life in normal use.
- IES photometric data available for all models.
- Lamp efficacy: 159 lumens/ watt.

### ELECTRONICS

- Lamps are connected in parallel. If one string of lamp fails, one or more strings will continue in operation.
- Power supply delivers regulated current and voltage to LED lamps at optimum levels to maximize lamp life.
- LED color temperature 4,700K and CRI of 70. 70% lumen maintenance (L70) at 50,000 hrs.

### POWER/LUMEN RANGE

| Emergency Power Watts | Wide Angle Lumens | Standard Model Lumens |
|-----------------------|-------------------|-----------------------|
| 20                    | 3319              | 3189                  |
| 30                    | 4978              | 4784                  |
| 40                    | 6637              | 6378                  |

### CODES

LED Lamp Assembly ROHS compliant, LM-79 tested, and rated IP67.

### WARRANTY

- 10 year total customer satisfaction warranty.



### ORDERING INFORMATION

| Model | Operation               | Emergency/Security Power Rating | Mount       | Finish         | Options                                                   |
|-------|-------------------------|---------------------------------|-------------|----------------|-----------------------------------------------------------|
| EHE   | AC = 120/ 277 VAC Input | 20= 20 Watts                    | S= Surface  | A= Aluminum    | DAC= Dual AC input for Security Lighting (AC Models Only) |
|       |                         | 30= 30 Watts                    | R= Recessed | BK= Black      | EM48= 48VDC Emergency Input                               |
|       |                         | 40= 40 Watts                    |             | W= Satin White | EB= End Bracket                                           |
|       |                         |                                 |             | X= Custom      | NAT= Natatorium Rated                                     |
|       |                         |                                 |             |                | PEN= Pendant Mount*                                       |
|       |                         |                                 |             |                | *Standard 12". Contact factory for other sizes.           |
|       |                         |                                 |             |                | ST= Stainless Mount Bracket (Surface Open Mount)          |
|       |                         |                                 |             |                | SV= Pendant Swivel Mount                                  |
|       |                         |                                 |             |                | WA= Wide Angle                                            |

Ordering Example: EHE-AC-30-S-W-WA



# EHE-AC

## LED High Bay Emergency Light with Night Lighting Option



PROJECT: \_\_\_\_\_  
FIXTURE TYPE: \_\_\_\_\_  
LOCATION: \_\_\_\_\_  
CONTACT/PHONE: \_\_\_\_\_


### SUGGESTED SPECIFICATIONS

Install EMLED Series EHE High Output LED emergency lighting fixture manufactured by Mule Lighting Inc. The unit may be specified to operate continuously for security or night lighting, as required.


### MOUNTING DATA & DIMENSIONS

#### INTERIOR & DAMP LOCATIONS


##### Recess Mount

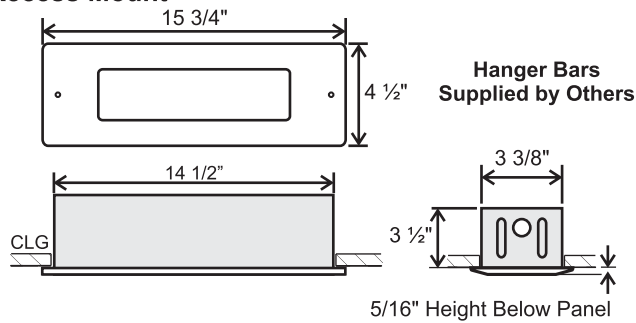

##### Surface Enclosed Mount Standard

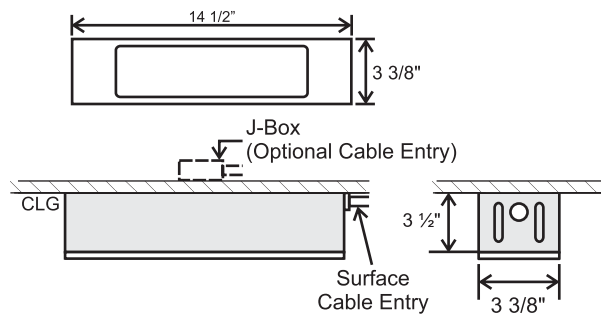


##### Pendant Mount



#### EXTERIOR & WET LOCATIONS

##### Recess Mount

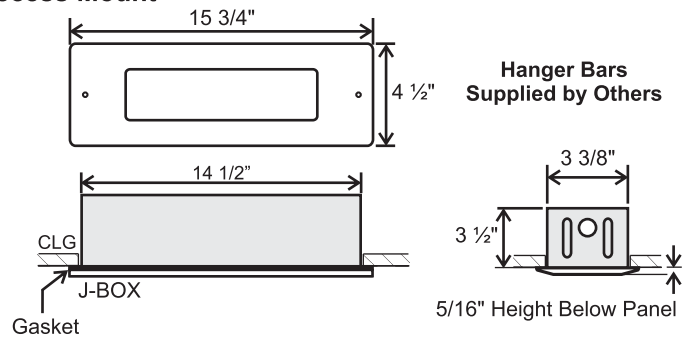

##### Surface Open Mount

