




**RMEZXTEU
RUNNING MAN LED EXIT SIGN**



PROJECT: _____
 FIXTURE TYPE: _____
 LOCATION: _____
 CONTACT/PHONE: _____



DIMENSIONS

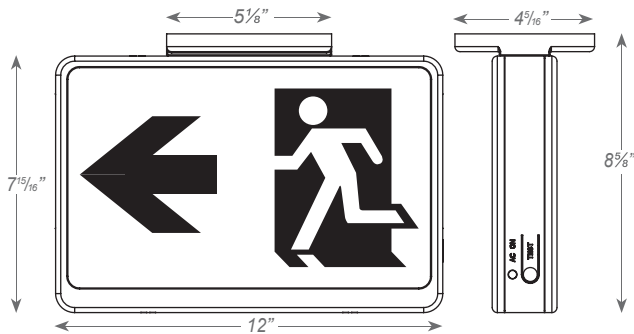

ILLUMINATION

- Ultra bright, energy efficient, long-lasting white LED provides even, fully illuminated panel.

HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.

ELECTRICAL

- Dual 120/347 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 9.6V Long life, maintenance-free, rechargeable NiCd battery.
- Remote capacity of 2.0W standard.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- EZ-snap mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.
- Field selectable, universal directional indication provided with three (Left, Right and No Arrow) pictogram legends.

WARRANTY

- Five year warranty on all electronics and housing. Battery pro rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- CSA listed for damp locations (0°C – 50°C).
- Meets or exceeds CSA C22.2 No. 141.10 standard requirements for Emergency lighting equipment.

ORDERING INFORMATION

Model	Number of Faces	Housing Color	Battery	Options
RMEZXTEU	2 = Universal Single/ Double Face	W= White B= Black	BLANK = AC EM = Battery Backup	SDT = Self-diagnostics

EXAMPLE: RMEZXTEU-2-W



**RMEZXTEU
RUNNING MAN LED EXIT SIGN**



PROJECT: _____
FIXTURE TYPE: _____
LOCATION: _____
CONTACT/PHONE: _____

ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	347V	120V	347V
RMEZXTE	4.4	4.4	0.037	0.013