U-MD Series


THE ULTIMATE DIECAST SERIES

PROJECT:
FIXTURE TYPE:
LOCATION:
CONTACT/PHONE:



*** Red/Green Switchable**
*** Manual Test/Self-Diagnostics**

DIMENSIONS

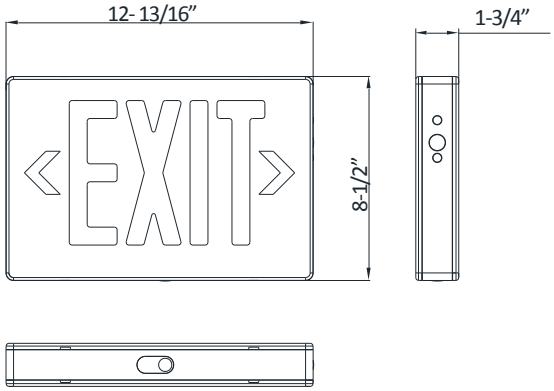

CONFIGURATION

• Die cast aluminum housing, compact and decorative design.
• Single and double face universal package.
• EXIT letter 6” height and 3/4”stroke, with knockout chevron directional arrows.
• Red and Green LED color changeable, red and green diffuser changeable.

ELECTRICAL

• 120 to 277VAC universal voltage, 50/60Hz.
• Recharge time 24 hours, emergency runtime more than 90 minutes, lithium iron phosphate battery.
• Trickle charge after battery fully charged.
• Battery discharge protection.
• Solid-State transfer circuit.
• Test Switch / Charge Indicator light.

ILLUMINATION

• Field selectable Red or Green sign with matched color diffuser.
• Default setting at factory is red color

UNIVERSAL ATTRIBUTES

• Self-testing and self-diagnostics is standard, can switch to manual test function if application requires.

MOUNTING

• Suitable for wall mounting , ceiling mounting and end mounting.
• Universal J-Box mounting pattern on back plate.
• Canopy provided for ceiling & end mounting.
• Pendant Mounting optional

CODE COMPLIANCE

• UL listed and meets or exceed all requirement in NFPA 70, NFPA 101 life safety code.
• Suitable for damp location.
• Compliant CEC title 20 efficiency regulation.

RoHS COMPLIANT

EXIT EXIT
SLIDER SWITCH

ORDERING INFORMATION

Model	Description
U-MD-U-BAB	Ultimate DieCast EXIT, Single/Double Face, RED/Green Switchable, Battery Backup, Self-Diagnostics/ Manual Test Switchable, Black with Brushed Aluminum Finish
U-MD-U-WW	Ultimate DieCast EXIT, Single/Double Face, RED/Green Switchable, Battery Backup, Self-Diagnostics/ Manual Test Switchable, All White Finish
U-MD-U-BAB-REM	Ultimate DieCast EXIT, Single/Double Face, RED/Green Switchable, Battery Backup, Self-Diagnostics/ Manual Test Switchable, Black with Brushed Aluminum Finish/ 1.5 Watt remote Capability

ORDERING EXAMPLE: U-MD-U-BAB

Mule Lighting , Inc. 46 Baker Street Providence, RI 02905 800 556-7690 P 401 941-2929 F www.mulelighting.com

ACCESSORIES (ORDER SEPARATELY)

PNDT-PVT-WH-12	12" Pendant Mounting Kit, White
PNDT-PVT-WH-24	24" Pendant Mounting Kit, White
PNDT-PVT-WH-36	36" Pendant Mounting Kit, White
PNDT-PVT-WH-48	48" Pendant Mounting Kit, White
PNDT-PVT-BL-12	12" Pendant Mounting Kit, Black
PNDT-PVT-BL-24	24" Pendant Mounting Kit, Black
PNDT-PVT-BL-36	36" Pendant Mounting Kit, Black
PNDT-PVT-BL-48	48" Pendant Mounting Kit, Black
PNDT-PVT-BA-12	12" Pendant Mounting Kit, Brushed Aluminum
PNDT-PVT-BA-24	24" Pendant Mounting Kit, Brushed Aluminum
PNDT-PVT-BA-36	36" Pendant Mounting Kit, Brushed Aluminum
PNDT-PVT-BA-48	48" Pendant Mounting Kit, Brushed Aluminum
WWG-1	Wire Guard (wall mount)
BG-1	Vandal Resistant Bubble Shield

MODEL LIST & ELECTRICAL RATING

No.	Type	Letter Color	Test Facility	Battery	Recharge Time	Emergency Run time	Input Rating				Output Rating	
							Vac	Hz	mA	W	Integral	Remote Capability
1	Battery	Red/Green Universal	Self-testing Self-diagnostics	$LiFePO_4$ 3.2V400mAh	24 hours	90 minutes	120-277	50/60	22	1.2	0.3W	/