



C1D2 Exit

HAZARDOUS | NEMA 4X | VANDAL RESISTANT



PROJECT: _____
 FIXTURE TYPE: _____
 LOCATION: _____
 CONTACT/PHONE: _____




SPECIFICATIONS: INTERNAL

Standard 120/277V input on all versions. Self Powered (WB) models use maintenance free, Nickel Cadmium batteries that provide a minimum 90 minutes emergency duration. Fuse protection is standard.

SPECIFICATIONS: EXTERNAL

The durable NEMA 4X fiberglass enclosure is corrosion and vandal resistant. The housing is fully gasketed and is supplied standard in an industrial gray finish. The C1D2 EXIT can be surface mounted on a wall. Offered in a single face version only. Removable chevrons are standard. The Self Powered (WB) version comes standard with and LED status indicator and a magnetic test switch.

DIMENSIONS

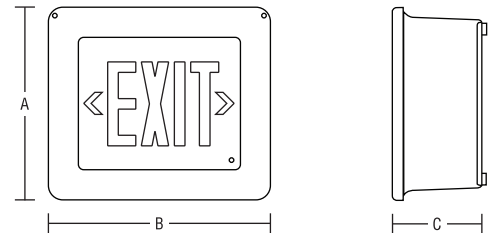

Series	A	B	C
C1D2-E	13.5"	15.5"	6.25"
	343mm	394mm	59mm

ORDERING INFORMATION

Series	Model	LED	Face No.	Mounting	Options
C1D2-E	AC (AC Only)	LR (red)	1 (single)	W (Wall)	SD (self-diagnostic - for WB model only)
	WB (Self-powered)	LG (green)			FL (flashing alarm)
					TP (tamper proof screws)
					SW (special wording- specify)
					2CK (dual circuit)
					120SP (120 min emergency)
					WG (wire guard)

EXAMPLE: C1D2-E-WB-LR-1-W-SD





C1D2 Exit

HAZARDOUS | NEMA 4X | VANDAL RESISTANT



PROJECT: _____
 FIXTURE TYPE: _____
 LOCATION: _____
 CONTACT/PHONE: _____

SPECIFICATIONS: ELECTRICAL

BATTERY: The C1D2-E-WB is designed with a maintenance free, nickel cadmium battery providing a minimum emergency duration of 90 minutes. Optional 120 minute nickel-cadmium batteries are available. Recharge time of the battery is forty-eight [48] hours. The operating temperature is from 50°F up to 104°F (10°C up to 45° C).

CIRCUIT: The C1D2 EXIT is configured with high output, high efficiency red or green LEDs that consume less than 2W. Configured with 120/277V input. Magnetic test switch and monitor LED.

HAZARDOUS APPROVALS

The C1D2 series is approved for use in Class 1, Division 2, Groups A, B, C and D: T2B area classification. In addition, the C1D2 is also suitable for Class I, Zone 2, IIA, IIB & IIC: T1 & T2 area classification.

WARRANTY

The C1D2 EXIT comes with a 5-year factory warranty. Lamps are not covered under the warranty. Deliberate damage, misuse, improper installation effectively cancel the warranty.

SPECIFICATIONS: MECHANICAL

The C1D2 EXIT housing is constructed from durable, corrosion resistant fiberglass. The NEMA 4X housing is fully gasketed for harsh and hazardous locations. The front access panel/door is hinged for trouble-free installation and maintenance. The EXIT face is made from a high clarity, clear polycarbonate that has been painted gray on the internal side only, making the unit highly scratch resistant. Field removable chevrons are standard. Special wording / graphics are available, please specify.

SELF-DIAGNOSTIC

The Mule self-diagnostic feature automatically performs a 5 minute discharge test monthly. Every 6 months, two 90 minute discharge tests are performed 24 hours apart. This tests both the battery capacity and recharge capability. The status of the C1D2 EXIT is communicated clearly with a single, multi-color LED indicator.

The C1D2 has been designed to perform in applications where the environment would punish any standard unit. The entire internal cavity of the sign is protected from moisture ingress by an extremely resilient gasket. The gasketing always holds its original form and has “memory retention” so that it effectively and consistently protects the C1D2 from moisture.