

New York Precision Series - NYELX

Recessed Mount NY Approved Edge-Lit Exit Sign

PROJECT: FIXTURE TYPE: LOCATION: CONTACT/PHONE

PRODUCT DESCRIPTION

Mule NYELX-R Series Recessed Mount Edge-Lit LED Exit Signs offer long lamp life, energy efficiency and uniform illumination. They are specifically designed for recessed applications in drywall or drop ceilings. The premium architectural design of the edge-lit construction has made this the specification choice for exit signage. Mule's distinctive field-applied chevron directional indicators make the NYELX Series the most uncomplicated edge-lit sign to specify. Recessed mount construction makes it easy to enjoy the aesthetic benefits of edgelit with minimal disruption to the building's interior decor.

ILLUMINATION

- Ultra bright, energy efficient, long life Red LEDs.
- UV-stabilized, ultra-clear acrylic edgelit panel provides consistent, uniform illumination.
- Double face utilizes factory installed silver or white mylar background panel.
- New York City compliant 8" EXIT letters.

ELECTRICAL

- Dual 120/277 voltage standard.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V Long life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Compatible with drywall or drop ceiling mount installations.
 Bar hangers included.
- · Wall mount capability optional.

HOUSING

- Premium-grade, extruded aluminum housing.
- Extruded aluminum trim assembly is easily detachable from below, providing accessibility for service or maintenance.
 Available in optional black or white powder-coated finishes.
- Self-adhesive Chevron appliques and guide template provided for directional indication.


WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations ($0^{\circ}C 50^{\circ}C$).
- Certified to CEC under Title 20 Regulations.





DIMENSIONS

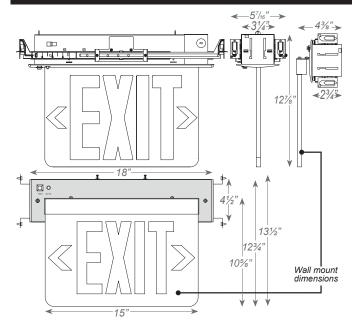

OPTIONS

- WM: Allows for the unit to be wall recessed mounted.
- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.

ORDERING INFORMATION							
MODEL	# OF FACES	BATTERY	LETTER	PANEL	TRIM PLATE	MOUNTING	OPTIONS
NYELX	1 = Single	A = AC Only	R = Red	C = Clear ¹	A = Aluminum	R = Recessed	WM = Wall Mount
	2 = Double	B = Battery Backup		M = Mirror	B = Black		SDT = Self-Diagnostics ²
				W = White	W = White		

Note: 1 With single face only. 2 Available only with EM units. *RED ON CLEAR NOT AVAILABLE ON DOUBLE FACE

Ordering Example: NYELX-1-A-R-C-A-R